

U.I. Lapp GmbH	PRODUCT INFORMATION	
EPIC® MC Module: Koax 3pole		05.11.2015

The mixed assembly guarantees high flexibility. For applications in mechanical and plant engineering, for printing machines and slide-in technology.

The mix of different functions in one plug guarantees high flexibility

Assembly of individual connectors, suitable for different applications



Automation & fältinstallation



Industrial machinery and plant engineering



Wind Energy



Info

RGB video signal transmission in one module

Application range

Plant engineering

Light & sound technology

Control engineering

Remark

Photographs are not to scale and do not represent detailed images of the respective products.

Technical Data

Rated voltage (V):	250 V
Contact resistance:	< 2,7 mOhm
Contacts:	Copper alloy, gold-plated
Number of contacts:	3
Termination methods:	Solder termination: var. coax cables
Cycle of mechanical operation:	100
Temperature range:	-40°C to +100°C, short-term up to +125°C
Degree of soiling:	3

Product Management	Document: LAPP_PRO811EN.pdf	1 / 3
--------------------	-----------------------------	-------




Part number	Article description	Contact type	Number of operating contacts	Slots	Pieces / PU
Module: 3-pin coax					
10399200	MCS 3 coax	male	3	1	10
10399300	MCB 3 coax	female	3	1	10


U.I. Lapp GmbH	PRODUCT INFORMATION	 LAPP GROUP
	EPIC® MC Module: Koax 3pole	05.11.2015



M

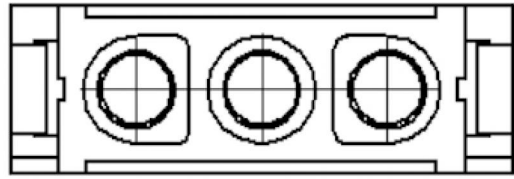

F

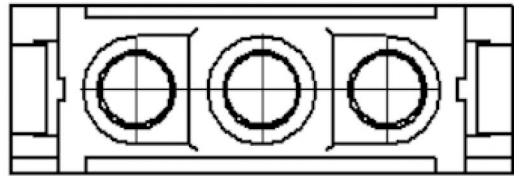

Product Management	Document: LAPP_PRO811EN.pdf	3 / 3
--------------------	-----------------------------	-------