

UL 1015 10AWG PVC

Solid Bare Copper, 105°C, 600V

PRODUCT DATA SHEET

Internal Wiring of Appliances.

Design Number 11134
Part Number See Table 1
Customer Number N/A

CONSTRUCTION

Conductor: Solid Bare Copper
Conductor Size: 10AWG(1/2.6mm)
Insulation: Polyvinyl chloride (PVC)
Insulation Avg. Thickness: 0.045"(Nom.)
Insulated O.D: 0.197"(Nom.)
Color: A variety of insulation colors available


Print Legend:

ASCENT E477982 **  AWM 1015 VW-1 105°C 600V 10AWG
c  AWM I A FT1 105°C 600V 10AWG xxxxxM

Note: "***" = Factory Code

Table 1

Part Number	Color
6000006612	Red
6000006613	Black

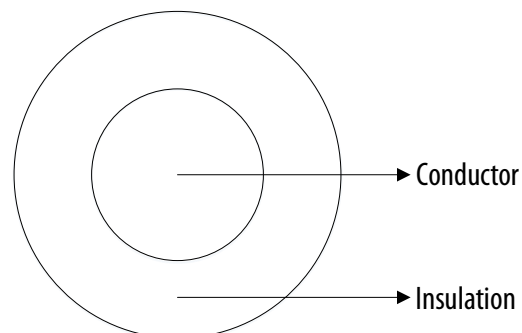

ELECTRICAL CHARACTERISTICS

Operating Temperature (°C): 105°C
Operating Voltage: 600V
Conductor Resistance@20°C: 3.343 Ω/km Max
Dielectric Test: 2.0 kV/1 min

SAFETY CHARACTERISTICS

Approvals: AWM UL 1015, CUL
Flame Test: UL VW-1
RoHS Compliant

Application: Internal Wiring of Appliances

All trademarks are property of their respective owners. All specifications are subject to change.

Revision History		
00	2025/06/12	Initial release
Created L. Jian	Approved T. Plochocki	

Milwaukee | 5001 South Towne Dr. New Berlin, WI 53151, USA
Frankfurt | Rudolf-Braas-Strasse 2, D-61381 Friedrichsdorf, Germany
Luton | Unit 11, Humphrys Road, Woodside Industrial Estate, Dunstable, LU5 4TP, UK
Suzhou | B2-2 Weiting Industrial - Workshop A, No. 9 Weixin Road, Suzhou Industrial Park, China