# **Detailed Specifications & Technical Data**



METRIC MEASUREMENT VERSION

# AX105208-B25 Modular Connectors - FX BRILLIANCE UNIVERSAL SC CONNECTOR



For more Information please call

1-800-Belden1




#### **General Description:**


FX Brilliance Universal SC Field Installable Connector, Singlemode, OS2, Blue Housing, 25/Pack, with support for 250 µm (using Breakout kit), 900 µm, 2 mm and 3 mm fiber (using jacketed boots). Includes 900 µm boot, other accessories (Breakout Kit & jacketed boots) sold separately.

#### Image

Image:

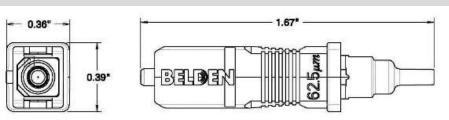

900 µm VERSION (OM1 SHOWN)

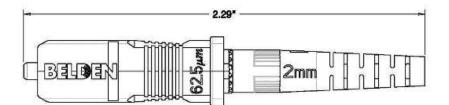

#### JACKETED VERSION (OM1 SHOWN)

#### Usage (Overall)

Suitable Applications:	Field-termination of fiber optic cables within Patch Panels, Distribution Frames, Workstation Outlets for FTTD (Fiber to the Desk), drops for FTTH (Fiber to the home) and MDU (Multiple Dwelling Units).
Related Parts:	FX Brilliance Precision Installation Kit, Boots for 2mm and 3mm Jacketed Fiber, 250µm to 900µm break out kits.

## **Physical Characteristics (Connectivity)**

# Materials

Ма	Materials:							
	Description	Material	Color					
	Boot	Rubber	Black					
	Protective Ferrule Cap	Plastic	Opaque					
	Connector Body	Plastic	Blue					



# METRIC MEASUREMENT VERSION

# AX105208-B25 Modular Connectors - FX BRILLIANCE UNIVERSAL SC CONNECTOR

Weight:				0.120 kg
Included Parts				-
Included Parts	:			900 µm boot, protective
Packaging				
00				Twenty five (25) conne
Packaging:				Twenty-five (25) conne
lechanical Cha	aracteristics (Connec	ctivity)		
Mechanical Specific	cations:			
Parameters		Specification		
Interconnection C		TIA/EIA-604-1		
Field Assembly Ti				ber preparation
Durability (Multime				.2 dB change, FOTP-21
Durability (Single- Nominal Fiber OD			s than 0.	.3 dB change, FOTP-21
Storage Tempera		125 µm		te (60°C)
		-40°F to +140°		
Operating Temper		-40°F to +167°		
	on 2 mm Jacketed fiber on 900 μm tight buffered fiber			than 0.2 dB change, FOTP
Tensile strength o			·	in 0.2 dB change, FOTP-6
Ferrule		Ceramic	, เธรร แเล	in 0.2 up change, FUTP-6
nnlicable Sne	cifications and Agen	cy Complia	nco (C	)vorall)
	ards & Environmental I	ingrallis		Vac
EU DIrective 20	002/95/EC (RoHS):			Yes
EU RoHS Com	pliance Date (mm/dd/yyyy):	:		07/01/2006
MII Order #39 (	China RoHS):			EUP 50
Telecommunic	ations Standards:			TIA 568-C.3
Safety Listing:				ACA
Suitability				
· · · · · · · · · · · · · · · · · · ·				
Suitability - Ind	door:			Yes - Indoor
Suitability - Ind				Yes - Indoor
Suitability - Ind	haracteristics (Conr	nectivity)		Yes - Indoor
Suitability - Ind Transmission C Transmission Speci	haracteristics (Conr			
Suitability - Ind Transmission C Transmission Speci Fiber type	Characteristics (Conr ifications: Maximum Insertion Loss	Typical Inserti	on Loss	Minimum reflectance @
Suitability - Ind Transmission C Transmission Speci Fiber type Multimode	Characteristics (Conr ifications: Maximum Insertion Loss 0.50 dB	Typical Inserti 0.20 dB	on Loss	Minimum reflectance @ -30 dB
Suitability - Ind Transmission C Transmission Speci Fiber type Multimode Single-mode UPC	Characteristics (Conr ifications: Maximum Insertion Loss 0.50 dB 0.50 dB	Typical Inserti 0.20 dB 0.30 dB	on Loss	Minimum reflectance @ -30 dB -50 dB
Suitability - Ind Transmission C Transmission Speci Fiber type Multimode	Characteristics (Conr ifications: Maximum Insertion Loss 0.50 dB 0.50 dB	Typical Inserti 0.20 dB	on Loss	Minimum reflectance @ -30 dB
Suitability - Ind Transmission C Transmission Speci Fiber type Multimode Single-mode UPC Single-mode APC	Characteristics (Conr ifications: Maximum Insertion Loss 0.50 dB 0.50 dB	Typical Inserti 0.20 dB 0.30 dB	on Loss	Minimum reflectance @ -30 dB -50 dB
Suitability - Ind Transmission C Transmission Speci Fiber type Multimode Single-mode UPC Single-mode APC	Characteristics (Conr ifications: Maximum Insertion Loss 0.50 dB 0.50 dB	Typical Inserti 0.20 dB 0.30 dB	on Loss	Minimum reflectance @ -30 dB -50 dB
Suitability - Ind Transmission C Transmission Specif Fiber type Multimode Single-mode UPC Single-mode APC Jotes (Overall)	Characteristics (Conr ifications: Maximum Insertion Loss 0.50 dB 0.50 dB	<b>Typical Inserti</b> 0.20 dB 0.30 dB 0.30 dB		Minimum reflectance @ -30 dB -50 dB -60 dB
Suitability - Ind Transmission C Transmission Speci Fiber type Multimode Single-mode UPC Single-mode APC Iotes (Overall) Notes: Refer to	Characteristics (Conr Ifications: Maximum Insertion Loss 0.50 dB 0.50 dB 0.50 dB 0.50 dB	<b>Typical Inserti</b> 0.20 dB 0.30 dB 0.30 dB		Minimum reflectance @ -30 dB -50 dB -60 dB
Suitability - Ind ransmission C Transmission Speci Fiber type Multimode Single-mode UPC Single-mode APC Notes: Refer to	Characteristics (Conr ifications: Maximum Insertion Loss 0.50 dB 0.50 dB 0.50 dB 0.50 dB	<b>Typical Inserti</b> 0.20 dB 0.30 dB 0.30 dB		Minimum reflectance @ -30 dB -50 dB -60 dB
Suitability - Ind Transmission Speci Fiber type Multimode Single-mode UPC Single-mode APC Iotes (Overall) Notes: Refer to Product Family	Characteristics (Conr ifications: Maximum Insertion Loss 0.50 dB 0.50 dB 0.50 dB 0.50 dB	<b>Typical Inserti</b> 0.20 dB 0.30 dB 0.30 dB		Minimum reflectance @ -30 dB -50 dB -60 dB res. Fiber can be retermina
Suitability - Ind Transmission Speci Fiber type Multimode Single-mode UPC Single-mode APC Iotes (Overall) Notes: Refer to Product Family Part Number List: Description	Characteristics (Conr ifications: Maximum Insertion Loss 0.50 dB 0.50 dB 0.50 dB 0.50 dB	Typical Inserti 0.20 dB 0.30 dB 0.30 dB	procedul Color	Minimum reflectance @ -30 dB -50 dB -60 dB
Suitability - Ind Transmission Speci Fiber type Multimode Single-mode UPC Single-mode APC Notes: Refer to Product Family Part Number List: Description FX Brilliance U	Characteristics (Conr ifications: Maximum Insertion Loss 0.50 dB 0.50 d	Typical Inserti 0.20 dB 0.30 dB 0.30 dB 4 for installation	procedui Color Beige	Minimum reflectance @ -30 dB -50 dB -60 dB res. Fiber can be retermina Belden Part Number AX105205-B25
Suitability - Ind Transmission Specie Fiber type Multimode Single-mode UPC Single-mode APC Notes (Overall) Notes: Refer to Product Family Part Number List: Description FX Brilliance U FX Brilliance U	Characteristics (Conr ifications: Maximum Insertion Loss 0.50 dB 0.50 d	Typical Inserti 0.20 dB 0.30 dB 0.30 dB 4 for installation tor 25/PK 1/PK	procedui Color Beige Beige	Minimum reflectance @ -30 dB -50 dB -60 dB res. Fiber can be retermina Belden Part Number AX105205-B25 AX105205-S1
Suitability - Ind Transmission Specie Fiber type Multimode Single-mode UPC Single-mode APC Notes: Refer to Product Family Part Number List: Description FX Brilliance U FX Brilliance U FX Brilliance U	Characteristics (Conr ifications: Maximum Insertion Loss 0.50 dB 0.50 d	Typical Inserti 0.20 dB 0.30 dB 0.30 dB 4 for installation tor 25/PK 1/PK tor 25/PK	procedui Color Beige Beige Black	Minimum reflectance @ -30 dB -50 dB -60 dB res. Fiber can be retermina Belden Part Number AX105205-B25 AX105205-S1 AX105206-B25
Suitability - Ind Transmission Specie Fiber type Multimode Single-mode UPC Single-mode APC Single-mode	Characteristics (Conr ifications: Maximum Insertion Loss 0.50 dB 0.50 d	Typical Inserti 0.20 dB 0.30 dB 0.30 dB 4 for installation tor 25/PK 1/PK tor 25/PK 1/PK	procedul Color Beige Beige Black Black	Minimum reflectance @ -30 dB -50 dB -60 dB res. Fiber can be retermina Belden Part Number AX105205-B25 AX105205-S1 AX105206-B25 AX105206-B25 AX105206-S1
Suitability - Ind Transmission Specie Fiber type Multimode Single-mode UPC Single-mode UPC Single-mode APC Iotes (Overall) Notes: Refer to Product Family Part Number List: Description FX Brilliance U FX Brilliance U FX Brilliance U FX Brilliance U	Characteristics (Conr ifications: Maximum Insertion Loss 0.50 dB 0.50 d	Typical Inserti 0.20 dB 0.30 dB 0.30 dB 4 for installation tor 25/PK 1/PK tor 25/PK 1/PK 1/PK tor 25/PK	procedul Color Beige Black Black Aqua	Belden Part Number           AX105205-B25           AX105206-B25           AX105206-B1           AX105207-B25
Suitability - Ind Transmission Specie Fiber type Multimode Single-mode UPC Single-mode APC Single-mode	Characteristics (Conr ifications: Maximum Insertion Loss 0.50 dB 0.50 d	Typical Inserti 0.20 dB 0.30 dB 0.30 dB 4 for installation tor 25/PK 1/PK tor 25/PK 1/PK the 25/PK 1/PK the 25/PK	Procedui Color Beige Black Black Aqua Aqua	Belden Part Number           AX105205-B25           AX105206-B25           AX105206-B25           AX105207-B25           AX105207-B25           AX105207-B25           AX105207-B25           AX105207-B25           AX105207-B25           AX105207-B25           AX105207-B25           AX105207-B25
Suitability - Ind Transmission Specie Fiber type Multimode Single-mode UPC Single-mode APC Notes: Refer to Product Family Part Number List: Description FX Brilliance U FX Brilliance U FX Brilliance U FX Brilliance U FX Brilliance U FX Brilliance U FX Brilliance U	Characteristics (Conr ifications: Maximum Insertion Loss 0.50 dB 0.50 d	Typical Inserti 0.20 dB 0.30 dB 0.30 dB 4 for installation tor 25/PK 1/PK tor 25/PK 1/PK tor 25/PK 1/PK tor 25/PK tor 25/PK tor 25/PK tor 25/PK	procedu Beige Black Black Aqua Aqua Erika Vid	Belden Part Number           AX105205-B25           AX105205-S1           AX105205-B25           AX105205-S1           AX105207-B25           AX105207-S1           olet           AX105253-B25
Suitability - Ind Transmission Specie Fiber type Multimode Single-mode UPC Single-mode APC Notes: Refer to Product Family Part Number List: Description FX Brilliance UI FX Brilliance UI	Characteristics (Conr ifications: Maximum Insertion Loss 0.50 dB 0.50 d	Typical Inserti 0.20 dB 0.30 dB 0.30 dB 4 for installation tor 25/PK 1/PK tor 25/PK 1/PK tor 25/PK 1/PK tor 25/PK 1/PK tor 25/PK 1/PK tor 25/PK 1/PK	procedu Beige Black Black Aqua Aqua Erika Vid Erika Vid	Belden Part Number           AX105205-B25           AX105205-S1           AX105207-B25           AX105207-B25           AX105207-B25           AX105207-B25           AX105207-S1           AX105207-B25           AX105207-B25           AX105207-S1           AX105207-S1           AX105207-S1           Olet           AX10525-S1
Suitability - Ind Transmission Speci Fiber type Multimode Single-mode UPC Single-mode APC Notes: Refer to Product Family Part Number List: Description FX Brilliance UI FX Brilliance UI	Characteristics (Conr ifications: Maximum Insertion Loss 0.50 dB 0.50 d	Typical Inserti 0.20 dB 0.30 dB 0.30 dB 4 for installation tor 25/PK 1/PK tor 25/PK 1/PK tor 25/PK 1/PK tor 25/PK 1/PK tor 25/PK	procedu Beige Black Black Aqua Aqua Erika Vid Blue	Belden Part Number           AX105205-B25           AX105205-S1           AX105207-B25           AX105207-S1           olet         AX10525-S1           AX10525-S1           AX10525-S1
Suitability - Ind Transmission Speci Fiber type Multimode Single-mode UPC Single-mode APC Notes: Refer to Product Family Part Number List: Description FX Brilliance U FX Brilliance U	Characteristics (Conr ifications: Maximum Insertion Loss 0.50 dB 0.50 d	Typical Inserti 0.20 dB 0.30 dB 0.30 dB 4 for installation 4 for installation tor 25/PK 1/PK tor 25/PK 1/PK tor 25/PK 1/PK tor 25/PK 1/PK tor 25/PK 1/PK tor 25/PK 1/PK	procedu Beige Black Black Aqua Erika Vid Erika Vid Blue Blue	Belden Part Number           AX105205-B25           AX105205-S1           AX105207-B25           AX105207-S1           Olet         AX10525-S1           AX105208-S1           AX105208-S1           AX105208-S1
Suitability - Ind Transmission Speci Fiber type Multimode Single-mode UPC Single-mode APC Notes: Refer to Product Family Part Number List: Description FX Brilliance U FX Brilliance U	Characteristics (Conr ifications: Maximum Insertion Loss 0.50 dB 0.50 d	Typical Inserti 0.20 dB 0.30 dB 0.30 dB 4 for installation 4 for installation tor 25/PK 1/PK tor 25/PK 1/PK tor 25/PK 1/PK tor 25/PK 1/PK tor 25/PK 1/PK tor 25/PK 1/PK tor 25/PK 1/PK tor 25/PK	procedu Beige Black Black Aqua Erika Vid Erika Vid Blue Blue Green	Belden Part Number           AX105205-B25           AX105205-S1           AX105205-S1           AX105205-S1           AX105205-S1           AX105205-S1           AX105205-S1           AX105205-S1           AX105205-S1           AX105205-S1           AX105206-S1           AX105207-B25           AX105207-S1           Olet         AX105208-B25           AX105208-B25           AX105208-B25           AX105208-B25           AX105208-B25           AX105208-B25           AX105208-B25           AX105208-B25
Suitability - Ind Transmission Speci Fiber type Multimode Single-mode UPC Single-mode APC Notes: Refer to Product Family Part Number List: Description FX Brilliance UI FX Brilliance UI	Characteristics (Conr ifications: Maximum Insertion Loss 0.50 dB 0.50 d	Typical Inserti 0.20 dB 0.30 dB 0.30 dB 4 for installation 4 for installation tor 25/PK 1/PK tor 25/PK 1/PK tor 25/PK 1/PK tor 25/PK 1/PK tor 25/PK 1/PK tor 25/PK 1/PK tor 25/PK 1/PK tor 25/PK	procedu Beige Black Black Aqua Erika Vid Erika Vid Blue Blue Green Green	Belden Part Number           AX105205-B25           AX105205-S1           AX105205-B25           AX105205-B25           AX105205-B25           AX105205-B25           AX105205-B25           AX105205-B25           AX105205-B25           AX105206-B25           AX105207-B25           AX105207-S1           Olet           AX105208-B25
Suitability - Ind Transmission Speci Fiber type Multimode Single-mode UPC Single-mode APC Single-mode APC Notes: Refer to Product Family Part Number List: Description FX Brilliance UI FX Brilliance UI	Characteristics (Conr ifications: Maximum Insertion Loss 0.50 dB 0.50 d	Typical Inserti 0.20 dB 0.30 dB 0.30 dB 4 for installation 4 for installation tor 25/PK 1/PK tor 25/PK 1/PK tor 25/PK 1/PK tor 25/PK 1/PK tor 25/PK 1/PK tor 25/PK 1/PK tor 25/PK 1/PK tor 25/PK	procedu Beige Black Black Aqua Erika Vid Erika Vid Blue Blue Green Green Black	Belden Part Number           AX105205-B25           AX105205-S1           AX105205-S1           AX105205-S1           AX105205-S1           AX105205-S1           AX105205-S1           AX105205-S1           AX105205-S1           AX105205-S1           AX105207-B25           AX105207-S1           Olet           AX105207-S1           Olet           AX105208-B25           AX105208-B25           AX105208-B25           AX105208-B25           AX105208-B25           AX105208-B25           AX105208-B25           AX105208-B25           AX105208-S1
Suitability - Ind Transmission Speci Fiber type Multimode Single-mode UPC Single-mode APC Single-mode APC Notes: Refer to Product Family Part Number List: Description FX Brilliance UI FX Brilliance UI	Characteristics (Conr ifications: Maximum Insertion Loss 0.50 dB 0.50 d	Typical Inserti 0.20 dB 0.30 dB 0.30 dB 4 for installation 4 for installation tor 25/PK 1/PK tor 25/PK 1/PK tor 25/PK 1/PK tor 25/PK 1/PK tor 25/PK 1/PK tor 25/PK 1/PK tor 25/PK 1/PK tor 25/PK	procedu Beige Black Black Aqua Erika Vid Erika Vid Blue Blue Green Green Black Black	Belden Part Number           AX105205-B25           AX105205-S1           AX105205-S1           AX105205-B25           AX105205-S1           AX105205-S1           AX105205-B25           AX105205-S1           AX105205-S1           AX105208-S1           AX105207-S1           Olet           AX105208-B25           AX105207-S1           Olet           AX105208-B25           AX105215-B25
Suitability - Ind Transmission Speci Fiber type Multimode Single-mode UPC Single-mode UPC Single-mode APC Notes: Refer to Product Family Part Number List: Description FX Brilliance UI FX Brilliance	Characteristics (Conr ifications: Maximum Insertion Loss 0.50 dB 0.50 d	Typical Inserti 0.20 dB 0.30 dB 0.30 dB 4 for installation 4 for installation tor 25/PK 1/PK tor 25/PK 1/PK tor 25/PK 1/PK tor 25/PK 1/PK tor 25/PK 1/PK tor 25/PK 1/PK tor 25/PK 1/PK tor 25/PK	procedu Beige Black Black Aqua Erika Vid Erika Vid Blue Blue Green Green Black Black Black N/A	Belden Part Number           AX105205-B25           AX105205-S1           AX105205-S1           AX105205-S1           AX105205-S1           AX105205-S1           AX105205-S1           AX105205-S1           AX105205-S1           AX105208-S1           AX105208-S1           AX105207-S1           Olet           AX105208-S1           AX105216-S25           AX10100
Suitability - Ind Transmission Speci Fiber type Multimode Single-mode UPC Single-mode APC Single-mode APC Notes: Refer to Product Family Part Number List: Description FX Brilliance UI FX Brilliance	Characteristics (Conr ifications: Maximum Insertion Loss 0.50 dB 0.50 d	Typical Inserti 0.20 dB 0.30 dB 0.30 dB 4 for installation tor 25/PK 1/PK tor 25/PK 1/PK tor 25/PK 1/PK tor 25/PK 1/PK tor 25/PK 1/PK tor 25/PK 1/PK tor 25/PK	procedu Beige Black Black Aqua Erika Vid Erika Vid Blue Blue Green Green Black Black	Belden Part Number           AX105205-B25           AX105205-S1           AX105205-S1           AX105205-B25           AX105205-S1           AX105205-S1           AX105205-B25           AX105205-S1           AX105205-S1           AX105208-S1           AX105207-S1           Olet           AX105208-B25           AX105207-S1           Olet           AX105208-B25           AX105215-B25

#### Put Ups and Colors:

Breakout Kit 12 fibers for Central Tube Loose Tube Cable

AX104696

N/A



#### AX105208-B25 Modular Connectors - FX BRILLIANCE UNIVERSAL SC CONNECTOR

Item #	Putup	Ship Weight	Color	Notes	Item Desc
AX105208-B25	25 EA	6.250 KG			FX BR UNIVERSAL SC SM 25/PK

Revision Date: 08-07-2014 Revision Number: 0

© 2015 Belden, Inc All Rights Reserved

All Rights Reserved. Although Belden makes every reasonable effort to ensure their accuracy at the time of this publication, information and specifications described herein are subject to error or omission and to change without notice, and the listing of such information and specifications does not ensure product availability. Belden provides the information and specifications herein on an "AS IS" basis, with no representations or warranties, whether express, statutory or implied. In no event will Belden be liable for any damages (including consequential, indirect, incidental, special, punitive, or exemplary damages) whatsoever, even if Belden has been advised of the possibility of such damages, whether in an action under contract, negligence or any other theory, arising out of or in connection with the use, or inability to use, the information or specifications described herein. All sales of Belden products are subject to Belden's standard terms and conditions of sale. Belden believes this product to be in compliance with EU RoHS (Directive 2002/95/EC, 27-Jan-2003). Material manufactured prior to the compliance date may be in stock at Belden facilities and in our Distributor's inventory. The information, and belief at the date of its publication. The information provided in this Product Disclosure, is correct to the best of Belden's knowledge, information, and belief at the date of its publication. The information provided in this product bisclosure is not to be considered a warranty or quality specification. Regulatory information is for guidance purposes only. Product users are responsible for determining the applicability of legislation and regulations based on their individual usage of the product.