


2 CONDUCTOR 16 AWG GPT TRAILER CABLE

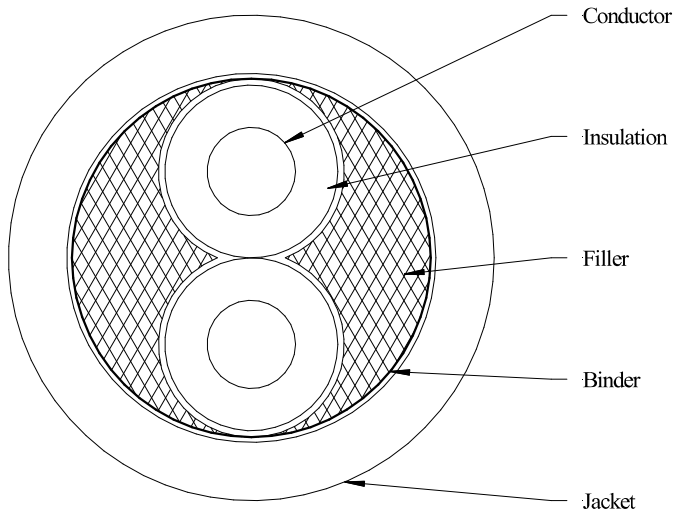

CONSTRUCTION

Single Component

Conductor: 16 AWG 19/.0117" Bare Copper, 0.056 Inch Diameter

Insulation: 0.023 Inches of PVC, 0.102 Inch Diameter

Final Assembly

Core: 2 Singles (#1 – 2) Cabled Together with Fibrillated Polypropylene Filler in Each Interstice

Binder: Non-Woven Polyester Tape, 25% Overlap

Jacket: 0.032 Inches of PVC, Color – Black

Diameter: 0.272 Inches Nominal

Print Legend: None

COLOR CODE

Conductor #	Insulation Color	Tracer Color
1	Black	
2	Gray	Blue


ELECTRICAL CHARACTERISTICS

Conductor DC Resistance: 4.2 Ohms/1000 ft Nominal @ 20°C

SAFETY CERTIFICATION

RoHS Compliance: In accordance with EU Directive 2011/65/EU for the Restriction of Hazardous Substance as amended by 2015/863/EU

REACH Compliance: In accordance with the current candidate list from Regulation (EC) No 1907/2006 Article 33(1) of the European Parliament and of the Council, dated 18 December 2006, concerning the Registration, Evaluation, Authorisation and Restriction of Chemicals



134 Ferry Street
South Grafton, MA 01560
Tel: (508) 234-6372

REVISION HISTORY

1	09/15/25	BF	Initial Release

Spec Number: 8447

Part Number:

Customer: IEWC Global Solutions

Customer #:

Prepared By: B. Fleming

Reviewed By: B. Harvie

Page

1 of 1

Hueson Wire & Cable reserves the right to make changes in materials or processing without notification to the Buyer, which do not affect compliance with any specification.