



DESC: 16/4 CABLE 105°C 300V

DWG NO: 1604C015

SCALE: 20x

DATE: 5/19/05

DR. BY: DP LANGER

NWI NO: FCAB164-011

CUSTOMER: INDUSTRIAL ELECTRIC

CUSTOMER P/N: TRC1604G-0-078V


ITEM

SPECS.

- A. 16 GAUGE GXL CONDUCTORS
19 STRAND BC .107 O.D.
SUPPLIED BY IEWC
- B. 18 GAUGE 16x30TC DRAIN
- C. ALUMINUM FOIL SHIELD, FOIL IN
25% MIN. OVERLAP 100% COVERAGE
- D. 25 MILS TUBED PVC JACKET 105°C 300V
20 MILS MIN. PVC JACKET BLACK JACKET
CABLE IS NOT UL OR CSA APPROVED

NORTHWIRE RESTRICTED

This document contains Northwire, Inc. proprietary data, and is not to be copied, reproduced, used or divulged to unauthorized persons, in whole or in part, without proper authorization in writing from Northwire, Inc. This information is the property of Northwire, Inc. which reserves all rights to it.

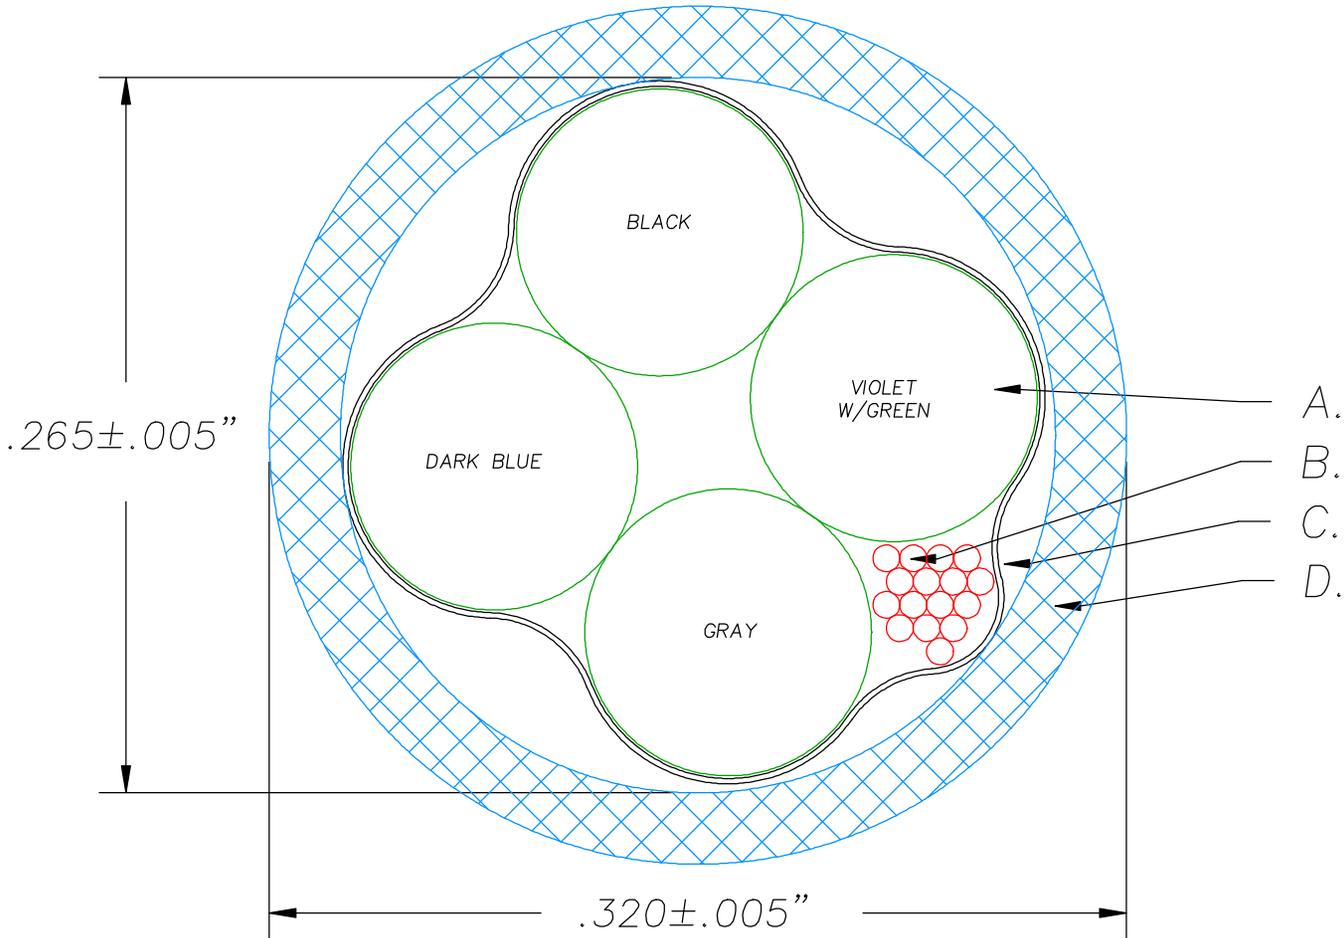

ELECTRICAL REQUIREMENTS:
NONE SPECIFIED

MECHANICAL REQUIREMENTS:
NONE SPECIFIED

INITIAL RELEASE	A	5/19/05	DPL	
REVISION RECORD	REV	REV DATE	APPROVAL	APPROVAL