



DESC: 22/4 CM 75C 300V

DWI NO: FCM224-006

SCALE: 30x

DATE: 2/11/10


DR. BY: M KAMISH

IEWC P/N: TBD

NWI P/N: FCM224-006

This document contains proprietary and confidential information of Northwire, Inc. (and its subsidiary) and shall not be used, disclosed or reproduced, in whole or in part, for any purpose without the prior written consent of Northwire, Inc. (and its subsidiary).

ITEM	SPECS.
A.	22 AWG 7x.0096" TC CONCENTRIC STRANDED COPPER O.D. .029±.001"
B.	9 MILS SR-PVC INSULATION 8 MILS MIN. SR-PVC INSULATION O.D. .049±.002"
C.	ALUMINUM/POLYESTER FOIL SHIELD (FOIL OUT)
D.	ALUMINUM/POLYESTER FOIL SHIELD (FOIL IN)
E.	24 AWG 7x.0076" TC DRAIN WIRE
F.	20 MILS PRESSURED PVC JACKET 16 MILS MIN. PVC JACKET
JACKET COLOR: GRAY	
CABLE IS UL AND CSA APPROVED	
CABLE IS RoHS COMPLIANT	

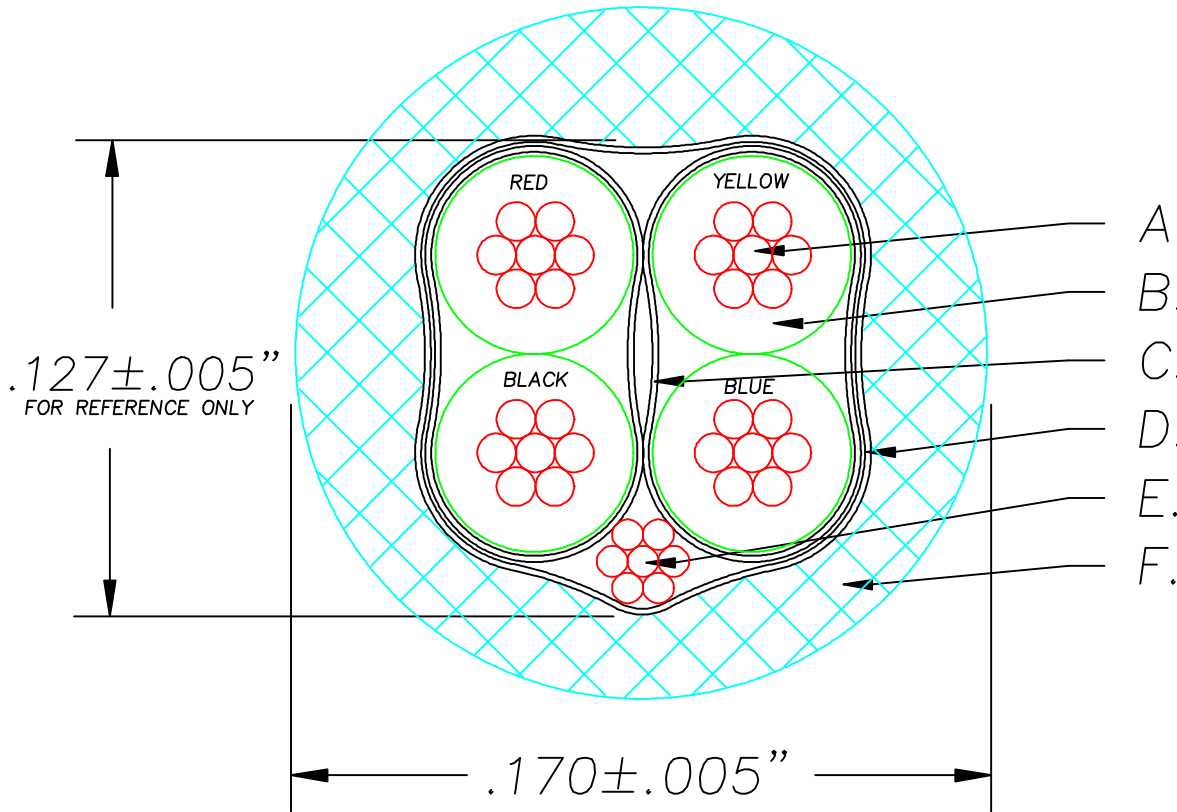

ELECTRICAL REQUIREMENT
NONE SPECIFIED

MECHANICAL REQUIREMENTS
NONE SPECIFIED

BLACK INK PRINT: (UL) CM 22 AWG/4 75C E130317 CSA CM 75C LL54185

INITIAL RELEASE	A	2/11/10	MK	
REVISION RECORD	REV	REV DATE	APPROVAL	APPROVAL