




ATLAS WIRE CORP

1601 Glenlake Ave. Itasca, IL 60143

(847) 678-1210

(847) 678-1281 FAX

www.atlaswirecorp.com




SPECIFICATION SHEET

Atlas Part #: 2207B1569

Description: #22 7/30 BARE COPPER 1/64" PVC

A - CONDUCTOR:		#22 7/30 BARE STRANDED COPPER	
A1	NOMINAL O.D.	0.030"	
	STANDARD	ASTM B 174	
B - INSULATION:		MATERIAL	PVC
	TEMPERATURE RATING	105C	
	VOLTAGE RATING	300v	
	ELONGATION	330% AVERAGE	
	TENSILE STRENGTH	2450 PSI AVERAGE	
B1	WALL THICKNESS (APPROX)	0.016"	
B2	INSULATED O.D. (APPROX)	0.062"	

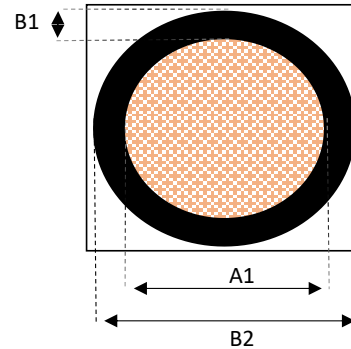

PRODUCT WEIGHT: WEIGHT / THOUSAND FEET (APPROX) 3.59 lbs.

REGULATORY COMPLIANCES REACH, RoHS, UL, CSA

PRINT LEGEND 22 AWG. E25635 RU AWM STYLE 1569 105C-300V OR AWM STYLE 1007 80C-300V VW-1 CSA 150272 TR64 90C FT1 OR AWM I A/B 105C 300V FT1

IMPORTANT:

All measurements are nominal, comply with applicable standards, and are subject to change. We make every reasonable effort to ensure data is current and accurate but there may be errors or omissions. It is the user's responsibility to ensure the product is relevant to their applicable usage, and according to their local codes. The sale of this product is subject to Atlas Wire LLC's standard terms and conditions.

Rev#

5/13/2025