


Web site: www.marinco.com
Phone: 800-307-6702
Date: January, 2011 Rev: 01

Receptacle, Locking
30A, 250V, 3Φ
3-Pole, 4-Wire

Catalog Number: 3015R

- Item:** Receptacle, single locking.
- Rating:** 30 amperes, 250 volts, 3 phase, NEMA configuration L15-30R.
- Materials:** All plastic parts are black, glass-filled, heat resistant nylon with a UL flammability rating of 94V-0.
Mounting straps, rivets and grounding strip are solid brass.
- Terminals:** Clamp-type. Clamp is solid brass, and terminal screws are solid brass, No. 10, slot/cross head. Cross head accommodates #2 driver.
- Contacts:** All contacts are brass, rivetless one-piece construction, nominal 0.045" thick.
- Options:** Available without mounting screws (3015R.OEM.NMS).
Available without mounting screws and mounting straps (3015R.OEM.NE).
- Certifications:** UL listed, File E111198
CSA certified, File LR81290

Dimensions:

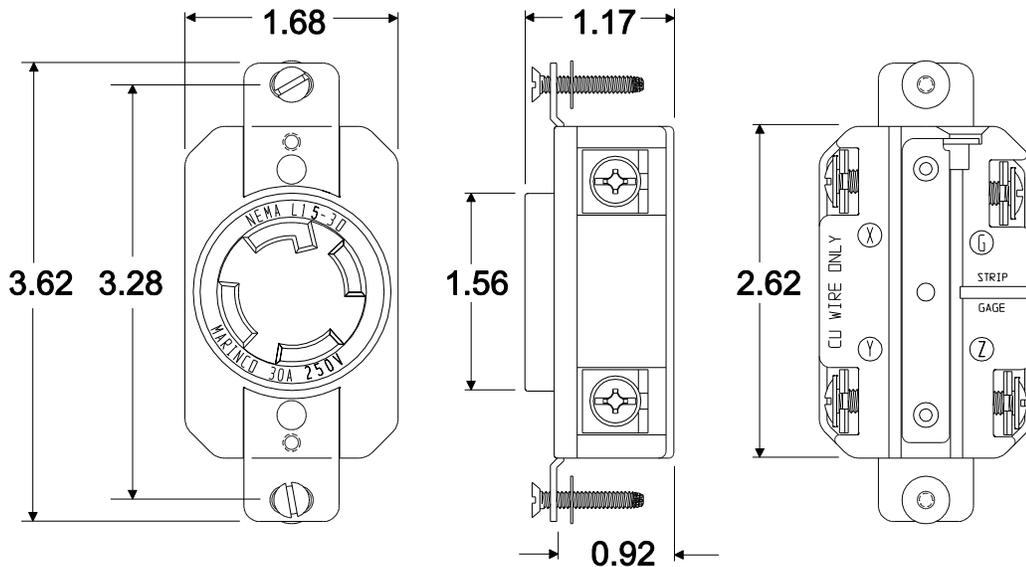

Dimensions shown in inches