
## 14 AWG SOLID TC ECO-HOOKUP WIRE

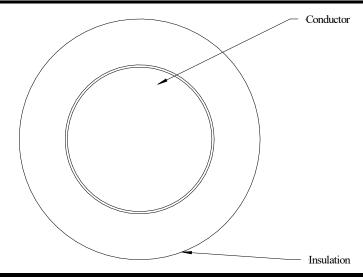

## CONSTRUCTION

Conductor: 14 AWG Solid Tin Plated Copper, 0.064 Inch Diameter

 $\textbf{Insulation: } 0.012 \ Inches of \ Polyethelene, \ Color-Blue$ 

**Diameter**:  $0.088 \pm 0.002$  Inches

## **ELECTRICAL CHARACTERISTICS**

Voltage Rating: 600 Volts

Spark Test Voltage: 6,000 Volts DC

Conductor DC Resistance: 2.6 Ohms/1000 ft Nominal @ 20°C

## SAFETY CERTIFICATION

**UL Recognized**: AWM Style 11028 105°C 600 Volts VW-1 **c(UR) Recognized**: AWM I A/B 105°C 600 Volts FT1

RoHS Compliance: In accordance with current amendments of EU Directive

2011/65/EU for the Restriction of Hazardous Substance

**REACH Compliance**: In accordance with the current candidate list from Regulation (EC) No 1907/2006 Article 33(1) of the European Parliament and of the

Council, dated 18 December 2006, concerning the Registration,

Evaluation, Authorisation and Restriction of Chemicals.

	34 Ferry Street South Grafton, MA 01560	REVISION HISTORY					
Hueson		1	03/20/25	HA	Initial Release		
Wire & Cable							
	Геl: (508) 234-6372						
	(200) 23 ( 03/2						
Spec Number:	4501						
Part Number:	1102814/1T -6						-
<b>Customer:</b>	IEWC Global Solutions	Prepared By: H. A			ousamra		Page
Customer #:		Reviewed By: B. I			rvie		1 of 1
Hueson Wire & Cable reserves the right to make changes in materials or processing without notification to the Buyer, which do not affect compliance with any specification.							