Product Specification

BELDEN
SENDING ALL THE RIGHT SIGNALS®

Part No.: BO-4105

Cross Section

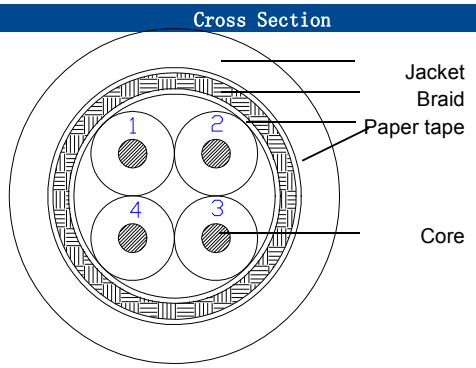

Marking

BELDEN 4X0.34SQMM 90C 300V ROHS

Description

Rated Temperature(℃)	-30~90
Rated Voltage (V)	300

Construction

4Cores	
Conductor	**Strand Bare Copper**
Size(mm2)	0.34
Construction (mm)	43/0.1
Str.Dia(mm)	0.76
Insulation	PVC
Min.thickness (mm)	0.22
Nom thickness (mm)	0.35
Dia (±0.08mm)	1.45
Assemble	4C
Direction	S
Paper tape(overlapping)	>=25%
Braid	Tinned Copper
Coverage	>=85%
Paper tape(overlapping)	>=25%
Jacket	PU
Min.thickness (mm)	0.22
Thickness (mm)	0.40
Dia (±0.20mm)	5.00

Color

Insulation
1.white 2.yellow 3.green 4.brown

Jacket
Per request(Dark grey Belden NO. 0801)(PANTONE 430 C和RAL 7046)

Performance

Electrical Charactistics(20℃)

Max DC Resistance at 20°C (Ω/km)	55.26

Sample Record

Sample No. :
Original spec SK-O-4105 Rev.:
Ref. spec No. SK-BO-4105 Rev.: 0

Revision History

Prepared by:	Andey	2012/11/20	Table No.:T100	Rev.: 0
Approved by:	CICICHENG	2012/11/20		Page 1 of 1

© 2016 Belden, Inc
All Rights Reserved.
Although Belden makes every reasonable effort to ensure their accuracy at the time of this publication, information and specifications described herein are subject to error or omission and to change without notice, and the listing of such information and specifications does not ensure product availability.
Belden provides the information and specifications herein on an "AS IS" basis, with no representations or warranties, whether express, statutory or implied. In no event will Belden be liable for any damages (including consequential, indirect, incidental, special, punitive, or exemplary damages) whatsoever, even if Belden has been advised of the possibility of such damages, whether in an action under contract, negligence or any other theory, arising out of or in connection with the use, or inability to use, the information or specifications described herein. All sales of Belden products are subject to Belden's standard terms and conditions of sale.