
DASH												
			DASH				DASH			DASH		
No. Co	OLOR	TRACER	No.	COLOR	TRACER	Ť	No.	COLOR	TRACER	No.	COLOR	TRACER
00 B	LACK	NONE	30	ORANGE	BLACK		60	BLUE	BLACK	90	WHITE	BLACK
01 B	LACK	BROWN	31	ORANGE	BROWN		61	BLUE	BROWN	91	WHITE	BROWN
02 BI	LACK	RED	32	ORANGE	RED		62	BLUE	RED	92	WHITE	RED
03 B	LACK	ORANGE	33	ORANGE	NONE		63	BLUE	ORANGE	93	WHITE	ORANGE
04 BI	LACK	YELLOW	34	ORANGE	YELLOW		64	BLUE	YELLOW	94	WHITE	YELLOW
05 BI	LACK	GREEN	35	ORANGE	GREEN		65	BLUE	GREEN	95	WHITE	GREEN
06 B	LACK	BLUE	36	ORANGE	BLUE	Г	66	BLUE	NONE	96	WHITE	BLUE
07 B	LACK	VIOLET	37	ORANGE	VIOLET		67	BLUE	VIOLET	97	WHITE	VIOLET
08 BI	LACK	GRAY	38	ORANGE	GRAY		68	BLUE	GRAY	98	WHITE	GRAY
09 BI	LACK	WHITE	39	ORANGE	WHITE	I	69	BLUE	WHITE	99	WHITE	NONE
10 BF	ROWN	BLACK	40	YELLOW	BLACK	T	70	VIOLET	BLACK			
11 BF	ROWN	NONE	41	YELLOW	BROWN	Т	71	VIOLET	BROWN			
12 BF	ROWN	RED	42	YELLOW	RED		72	VIOLET	RED			
13 BF	ROWN	ORANGE	43	YELLOW	ORANGE		73	VIOLET	ORANGE			
14 BF	ROWN	YELLOW	44	YELLOW	NONE		74	VIOLET	YELLOW			
15 BF	ROWN	GREEN	45	YELLOW	GREEN	Г	75	VIOLET	GREEN			
16 BF	ROWN	BLUE	46	YELLOW	BLUE	Г	76	VIOLET	BLUE			
17 BF	ROWN	VIOLET	47	YELLOW	VIOLET	Г	77	VIOLET	NONE			
18 BF	ROWN	GRAY	48	YELLOW	GRAY	Г	78	VIOLET	GRAY			
19 BF	ROWN	WHITE	49	YELLOW	WHITE		79	VIOLET	WHITE			
20	RED	BLACK	50	GREEN	BLACK	\top	80	GRAY	BLACK			
21 I	RED	BROWN	51	GREEN	BROWN		81	GRAY	BROWN			
22 I	RED	NONE	52	GREEN	RED		82	GRAY	RED			
23 I	RED	ORANGE	53	GREEN	ORANGE		83	GRAY	ORANGE			
24	RED	YELLOW	54	GREEN	YELLOW		84	GRAY	YELLOW			
25 I	RED	GREEN	55	GREEN	NONE		85	GRAY	GREEN			
26 I	RED	BLUE	56	GREEN	BLUE		86	GRAY	BLUE			
27 I	RED	VIOLET	57	GREEN	VIOLET		87	GRAY	VIOLET			
28 I	RED	GRAY	58	GREEN	GRAY		88	GRAY	NONE			
29 I	RED	WHITE	59	GREEN	WHITE		89	GRAY	WHITE			

CHANGE HISTORY								
REV	DESCRIPTION	DATE	DRAWN	APPROVED				
Α	ECN 6651	9/4/19	PDC	BSJ				
		.,,,,						
LENCTU : 1/4								

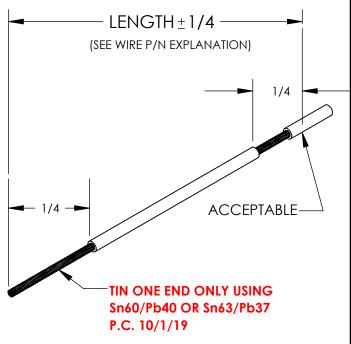

EXPLANATION OF WIRE PART NO.

TE WIRE COLOR NUMBER (SEE TABLE ABOVE)

EXAMPLE: 12 = 12 INCHES

-00 = BLACK

06 = 6 INCHES SP = SPOOL

ÈXAMPLE: -22 = RÉD

TE WIRE LENGTH

(IN INCHES)

7040-5282-XXXX

ETCHING REQUIREMENT:

REMOVE 2 FEET MINIMUM FROM EACH END OF ORIGINAL WIRE AFTER ETCHING TO PREVENT **ETCHANT FROM WICKING** ONTO CONDUCTOR.

1. GENERAL

1.1 28 AWG PER MIL-W-22759/32 1.2 MAX. TEMP.: 150°C

2. CONDUCTORS

2.1 STRANDING: 7/36 2.2 MATERIAL: COPPER

SPECIFICATIONS

3. INSULATION 3.1 TYPE: XL-ETFE

3.2 MAX. O.D.: .029 3.3 HVBD: 600 VOLTS

EAR CONTROL

TECHNICAL INFORMATION SUBJECT TO EXPORT ADMINISTRATION REGULATIONS (EAR). THIS TECHNICAL INFORMATION IS PROHIBITED FROM TRANSFER OR DISCLOSURE IN ANY MANNER TO NON-U.S. PERSONS IN THE UNITED STATES OR ABROAD WITHOUT PRIOR APPROVAL BY THE U.S. COMMERCE DEPARTMENT OR APPLICABLE EAR EXEMPTION

PROPRIETARY AND CONFIDENTIAL

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF TE CONNECTIVITY. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF TE CONNECTIVITY IS PROHIBITED.

		NAME	DATE	Г
DIMENSIONS ARE IN INCHES TOLERANCES	DRAWN	P. CARDEN	9/4/19	
ANGULAR ±2°	CHECKED	B. ST JACQUES	9/9/19	
TWO PLACE DECIMAL ±.01	ENG APPR.	E. LENCIONI	9/9/19	
HREE PLACE DECIMAL ±.005 OUR PLACE DECIMAL ±.0005	MFG APPR.			

NOTED

NOTED

DO NOT SCALE DRAWING Information in this box is for Engineering Reference Only



WIRE, HOOK-UP

CAGE CODE 5W885

DWG. NO. 7040-5282

SHEET 1 OF 1

TCPN FOR 12" LENGTHS WILL BE: 20011594-XX (-COLOR) TCPN FOR OTHER LENGTHS WILL BE DETERMINED WHEN NEEDED.