


REV. 0	DESCRIPTION Initial release	DATE 8/20/2019
-----------	--------------------------------	-------------------

Color Code	
Insulation	Orange

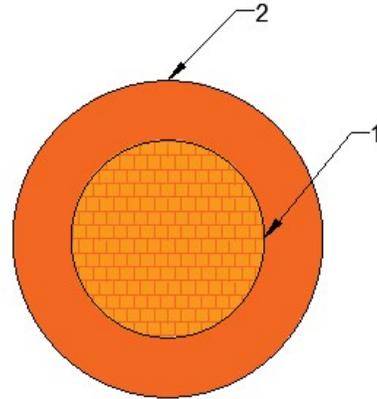

Item	Component	Description	Thickness				Dimensions				
			inch		mm		inch		mm		
			Nom	Min	Nom	Min	Nom	Tol	Nom	Tol	
1.	Conductor:	12.0mm2 175/.29mm BC					0.186	0.005	4.72	0.13	
2.	Insulation	ERGO-FLEX-2	0.028	0.020	0.71	0.51	<D>	0.242	0.010	6.15	0.25

Print: CCC 18014 CHAMPLAIN CABLE 12MM2 THIN WALL ERGOFLEX-2

Conductor Resistance: 1.52 mohms/meter Max at 20C
 Temperature Range: -40° C to +150° C
 Meets Requirements of: ISO 19642-5 Class D Thin Wall
 Weight: 81.72 #/MFt Nom.
 Static Bend Radius: inches mm
 1.2 31

	TITLE		12.0mm2 ERGO-FLEX-2 Thin Wall ISO16942	
	DRN.	Richard Antic	DATE	8/20/2019
Special Characteristics <S> Safety <D> Dimensional	CKD.		DATE	
DO NOT SCALE THIS DRAWING	SIZE A	PART NUMBER 15-08561-001	DOCUMENT NUMBER 18014	
The information on this drawing is the proprietary property of Champlain Cable Corporation, and may not be used, reproduced or disclosed to others, in whole or in part, without written authorization.			This is an uncontrolled preliminary drawing that requires validation of standards or conformances	
			PAGE	1 of 1