




Terminals & Splices > Quick Disconnects

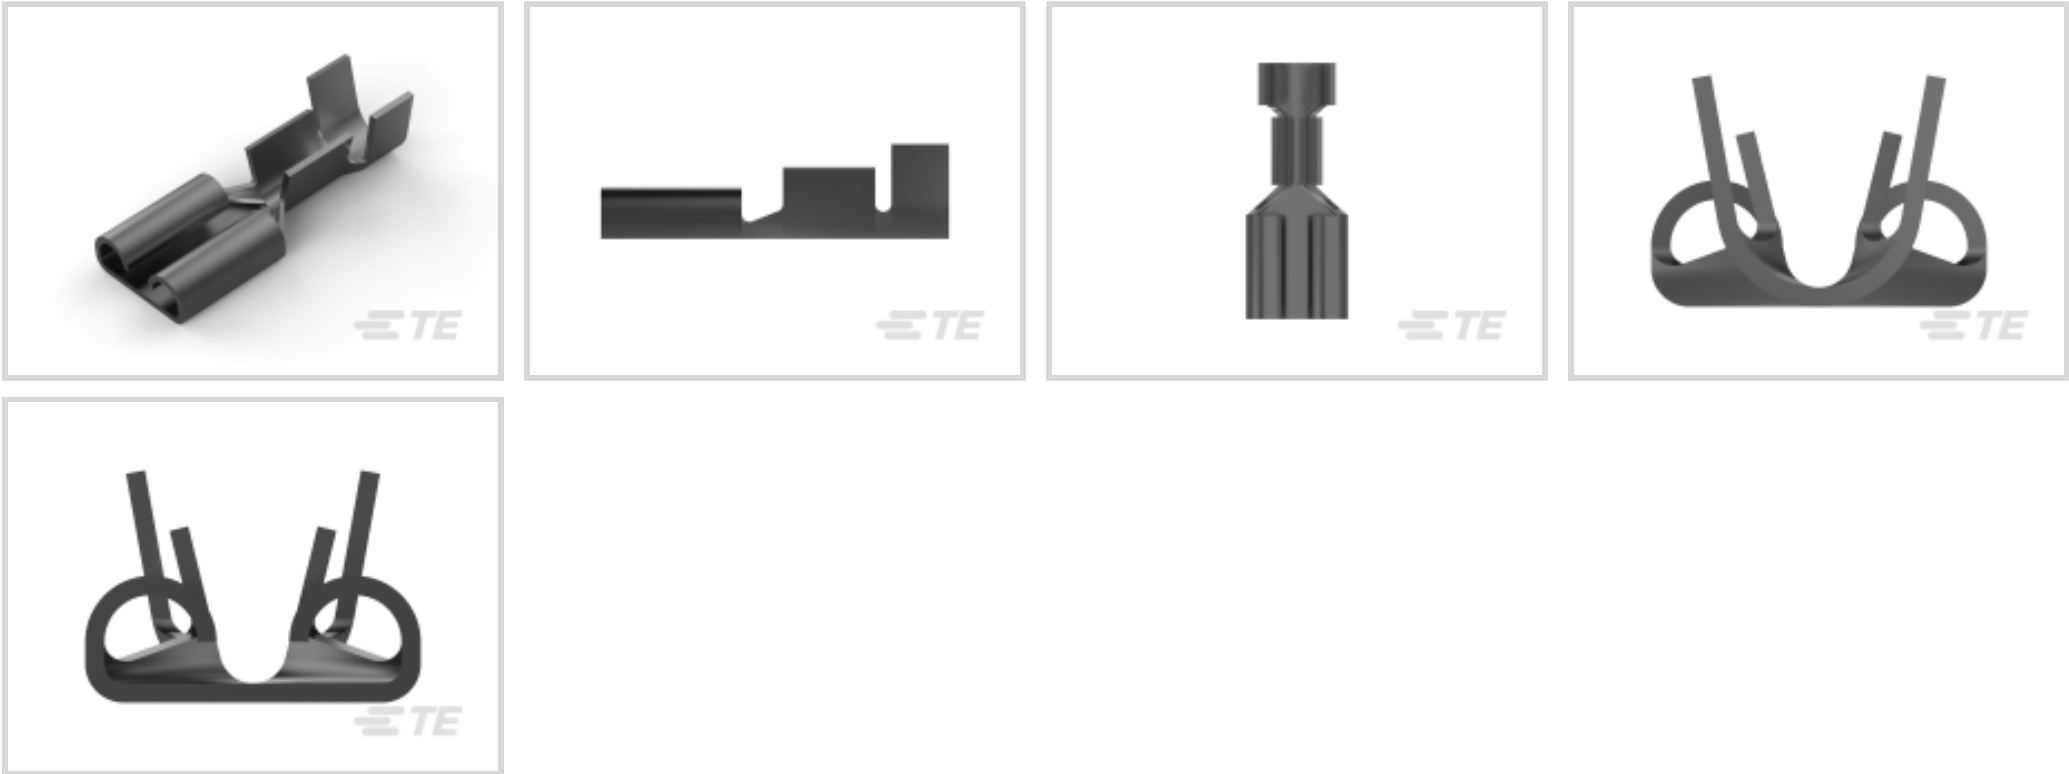

Quick Disconnect Terminal Type: **Receptacle**

Wire Size: **.82 – 2.08 mm<sup>2</sup>**

Mating Tab Width: **6.35 mm [.25 in]**

Mating Tab Thickness: **.81 mm [.032 in]**

Features

Product Type Features

|                 |        |
|-----------------|--------|
| Insertion Force | Normal |
|-----------------|--------|

Configuration Features

|                                   |               |
|-----------------------------------|---------------|
| Compatible With Wire & Cable Type | Discrete Wire |
| Connection Capacity               | Single        |

Contact Features

|                                |                 |
|--------------------------------|-----------------|
| Quick Disconnect Terminal Type | Receptacle      |
| Mating Tab Width               | 6.35 mm[.25 in] |
| Mating Tab Thickness           | .81 mm[.032 in] |
| Terminal Orientation           | Straight        |
| Contact Base Material          | Brass           |
| Terminal Plating Material      | Tin             |
| Crimp Type                     | F-Crimp         |
| Barrel Type                    | Open            |

Termination Features

|  |  |
|--|--|
|  |  |
|--|--|

|                       |              |
|-----------------------|--------------|
| Product Terminates To | Wire & Cable |
|-----------------------|--------------|

Mechanical Attachment

|                         |      |
|-------------------------|------|
| Wire Insulation Support | With |
|-------------------------|------|

Dimensions

|                                      |                            |
|--------------------------------------|----------------------------|
|                                      | .755 in                    |
| Compatible Insulation Diameter Range | 3.1 – 4.3 mm[.12 – .17 in] |
| Terminal Material Thickness          | .43 mm[.017 in]            |
| Wire Size                            | .82 – 2.08 mm²             |

Usage Conditions

|                             |                            |
|-----------------------------|----------------------------|
| Insulation Option           | Uninsulated                |
| Operating Temperature Range | -40 – 110 °C[-40 – 230 °F] |

Industry Standards

|                                           |         |
|-------------------------------------------|---------|
| Compatible With Agency/Standards Products | CSA, UL |
|-------------------------------------------|---------|

Packaging Features

|                    |            |
|--------------------|------------|
| Packaging Quantity | 11000      |
| Packaging Method   | Strip/Reel |

Other

|      |         |
|------|---------|
| Line | Premier |
|------|---------|

Product Compliance

For compliance documentation, visit the product page on TE.com>

|                                               |                                                                                                                               |
|-----------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------|
| EU RoHS Directive 2011/65/EU                  | Compliant                                                                                                                     |
| EU ELV Directive 2000/53/EC                   | Compliant                                                                                                                     |
| China RoHS 2 Directive MIIT Order No 32, 2016 | No Restricted Materials Above Threshold                                                                                       |
| EU REACH Regulation (EC) No. 1907/2006        | Current ECHA Candidate List: JAN 2025 (247)<br>Candidate List Declared Against: JAN 2025 (247)<br>Does not contain REACH SVHC |
| Halogen Content                               | Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free                                           |
| Solder Process Capability                     | Not applicable for solder process capability                                                                                  |

Product Compliance Disclaimer



This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts



TE Part # 90165-1  
DAHT 250 FASTON REC 18-14 ASSY



TE Part # 2150003-2  
OCEAN\_2.0\_APPLICATOR-E-120F180F-REA



TE Part # 2376595-2  
250 FASTON PCB TAB TPBR

Also in the Series | FASTON 250



Compression Connectors(4)



Crimp Terminal Housings(116)



Insertion & Extraction Tools(6)



Insulation Boots & Sleeves(16)



Magnet Wire Terminals(1)



PCB Terminals(133)



Quick Disconnects(421)



Splices(4)

Customers Also Bought



TE Part #521780-1  
250 HSG. PL MKIII REC. 7.11mm 5P  
NAT

TE Part #52856-1  
TERMINAL,PG SPD FLG 12-10 10

TE Part #60376-1  
PIN 090 RECEPTACLE 20-14 AWG  
TPPHBZ

TE Part #62056-6  
250 FASTON FLAG REC 18-12 AWG  
TPBZ

TE Part #63610-2  
SPRING SPADE TERMINAL 14-10  
AWG TPBR

TE Part #62056-7  
250 FASTON FLAG REC 18-12 AWG  
TPBZ

TE Part #1742539-3  
CLUSTER BLOCK RECEPT,TPCuFeP

TE Part #1217113-2  
187 PL MKIII REC. 22-18AWG TPBR

TE Part #61988-2  
250 FASTON REC 22-18 AWG TPBR

TE Part #63896-1  
250 FASTON REC 16-12 AWG BR

Documents

Product Drawings  
250 FASTON,REC.,18-14 AWG,TPBR  
English

CAD Files  
Customer View Model  
ENG\_CVM\_CVM\_41274\_DM.2d\_dxf.zip  
English  
3D PDF  
3D  
Customer View Model  
ENG\_CVM\_CVM\_41274\_DM.3d\_igs.zip  
English  
Customer View Model  
ENG\_CVM\_CVM\_41274\_DM.3d\_stp.zip  
English

By downloading the CAD file I accept and agree to the Terms and Conditions of use.

Datasheets & Catalog Pages

[FASTIN\\_FASTON\\_Product\\_Line](#)

English

[82004 FASTON Terminals \(Insulated and Uninsulated\) Catalog - FASTON Receptacles Section](#)

English

[Product Specifications](#)

[Engineering Report](#)

English

[Instruction Sheets](#)

[Instruction Sheet \(non U.S.\)](#)

Japanese

[Agency Approvals](#)

[Agency Approval Document](#)

English

[Agency Approval Document](#)

English