


REVISIONS

REV.	DCN #	DESCRIPTION:	BT:	DATE:
-	-	INITIAL RELEASE	TUF	12/22/2016
A	-	UPDATE PART NUMBER	RT	10/09/2018
B	-	UPDATE DESCRIPTIONS	DS	08/22/2024

28 AWG SINGLES (14):
28 AWG 40/44 BARE COPPER,
PVC INSULATION TO .025" ± .001" OD – WHITE, BLACK, RED, GREEN,
YELLOW, BLUE, BROWN, ORANGE, GRAY, VIOLET, WHITE/BLACK,
BLACK/WHITE, RED/WHITE, GREEN/WHITE
CABLE FOUR 28 AWG SINGLES PER DIAGRAM
– USE AS CORE –
CABLE TEN 28 AWG SINGLES AROUND CORE PER DIAGRAM
BRAIDED SHIELD:
40 AWG TIN PLATED COPPER BRAIDED SHIELD, 90% MIN COVERAGE
JACKET:
.023" PVC JACKET TO .170" ± .006" OD – BLACK

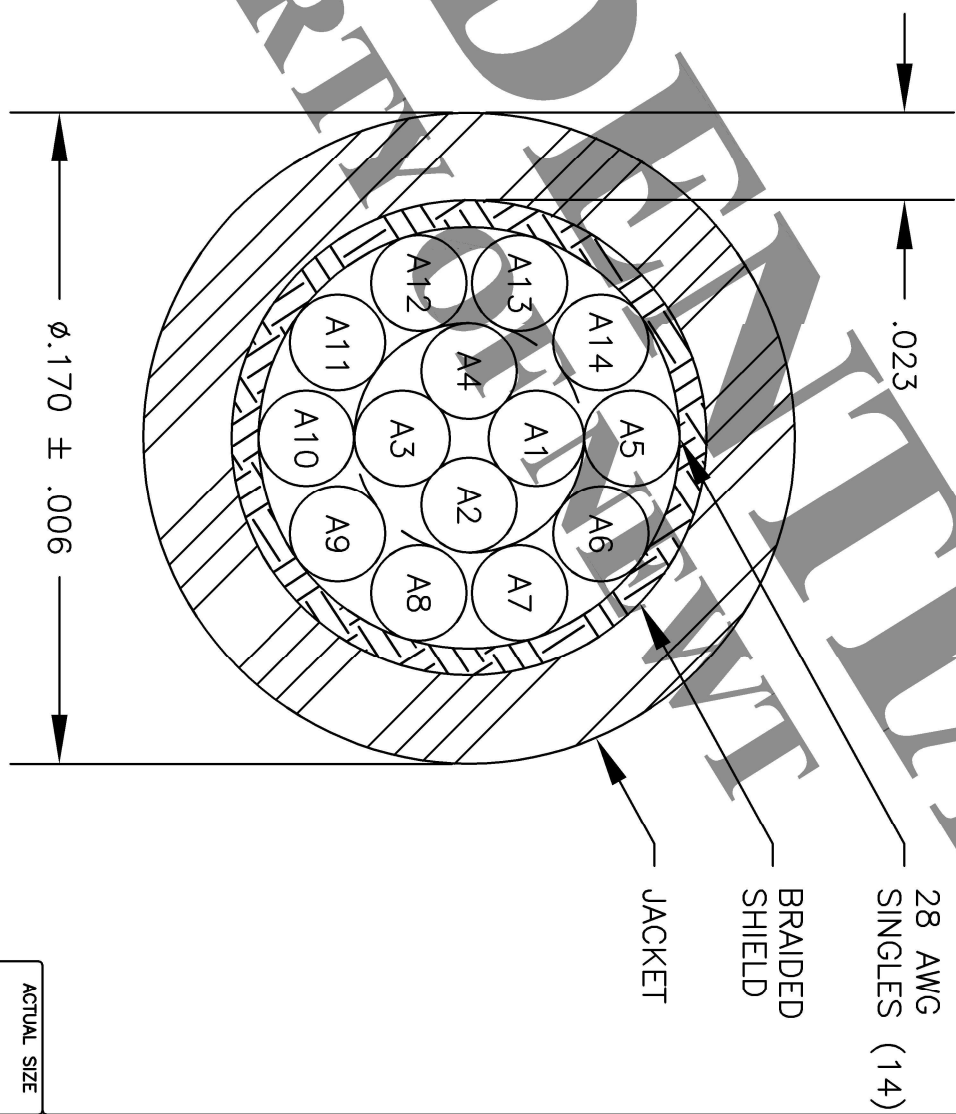

- COLOR CODING:
28 AWG SINGLES:
A1 = WHITE
A2 = BLACK
A3 = RED
A4 = GREEN
A5 = YELLOW
A6 = BLUE
A7 = BROWN
A8 = ORANGE
A9 = GRAY
A10 = VIOLET
A11 = WHITE/BLACK
A12 = BLACK/WHITE
A13 = RED/WHITE
A14 = GREEN/WHITE
JACKET = BLACK