


EXTRA & ULTRA-FLEXIBLE POLYVINYLCHLORIDE LEAD WIRE

Description

Extra flexible bare-copper conductor insulated with a 10 mil (.010") wall of extruded Polyvinylchloride, providing extra flexibility in a 600 volt miniature hook-up wire.

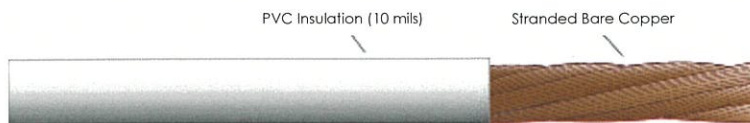


Temperature Rating: -55° to 105° C
Voltage Rating: 600 Volts

PART NUMBER	AWG SIZE	NO. OF STRANDS	AWG. AND DIA. OF STRANDS	NOM. WALL THICK.	DIAMETER OVER INSULATION NOM.
NEF16-66544	16	665	44 (.0020)	.011	0.087
NEF18-41344	18	413	44 (.0020)	.011	0.072
NEF20-25944	20	259	44 (.0020)	.010	0.061
NEF20-10540	20	105	40 (.0031)	.010	0.057
NEF22-15044	23	150	44 (.0020)	.010	0.049
NEF22-6540	22	66	40 (.0031)	.010	0.049
NEF24-10544	24	105	44 (.0020)	.010	0.044
NEF24-4240	24	42	40 (.0031)	.010	0.043
NEF26-10546	26	105	46 (.0016)	.010	0.040
NEF26-6544	26	66	44 (.0020)	.010	0.039
NEF28-6546	28	65	46 (.0016)	.010	0.035
NEF28-4044	28	40	44 (.0020)	.010	0.035
NEF30-4146	30	41	46 (.0016)	.010	0.032
NEF30-2544	30	25	44 (.0020)	.010	0.032
NEF32-2546	32	26	46 (.0016)	.010	0.029
NEF32-1644	32	16	44 (.0020)	.010	0.029
NEF34-1646	34	16	46 (.0016)	.010	0.027

Description

Ultra-Flexible stranded bare copper conductor insulated with a 5 mil (.005") wall of extruded Polyvinylchloride, providing the maximum flexibility available in a micro-miniature hook-up wire.

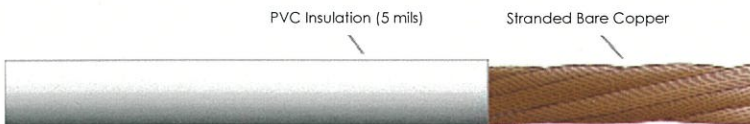

Temperature: -55° to 105° C
Voltage Rating: 300 Volts

PART NUMBER	AWG SIZE	NO. OF STRANDS	AWG. AND DIA. OF STRANDS	NOM. WALL THICK.	DIAMETER OVER INSULATION NOM.
NUF29-5146	29	52	46 (.0016)	.005	0.024
NUF30-4046	30	41	46 (.0016)	.005	0.022
NUF30-2544	30	25	44 (.0020)	.005	0.022
NUF32-6550	32	65	50 (.0010)	.005	0.019
NUF32-2546	32	26	46 (.0016)	.005	0.019
NUF34-4050	34	41	50 (.0010)	.005	0.017
NUF34-1044	34	10	44 (.0020)	.005	0.017
NUF36-2550	36	26	50 (.0010)	.005	0.016
NUF38-1650	38	17	50 (.0010)	.005	0.015

* Tinned-copper versions available upon request.

Standard Colors:

- | | |
|-----------|-----------|
| 0. Black | 6. Blue |
| 1. Brown | 7. Violet |
| 2. Red | 8. Gray |
| 3. Orange | 9. White |
| 4. Yellow | 10. Clear |
| 5. Green | |

