




This document contains proprietary and confidential information of Northwire, Inc. (and its subsidiary) and shall not be used, disclosed or reproduced, in whole or in part, for any purpose without the prior written consent of Northwire, Inc. (and its subsidiary).

Disclaimer: The technical data that is made part of this document may be subject to the International Traffic in Arms Regulation (ITAR) and the Export Administration Regulations (EAR). Disclosure of technical data to Foreign Persons in the course of employment with U.S. contractors is considered an export and is subject to the ITAR and EAR export licensing requirements/regulations. UNITS: IN SCALE: 16:1 | ITEM | SPECIFICATIONS

NORTHWIRE P/N: FAWM182-042 CUSTOMER: IEWC APPR BY: NN REVD BY: AM DWG NO: 1802A025 CUSTOMER P/N: 1802COFS-3NWA DRAWN BY: DP LANGER DATE: 1/2/2003 REV: G

CORE DIMENSIONS FOR INTERNAL USE ONLY

DESCRIPTION: 18/2 AWM 2095 80C 300V

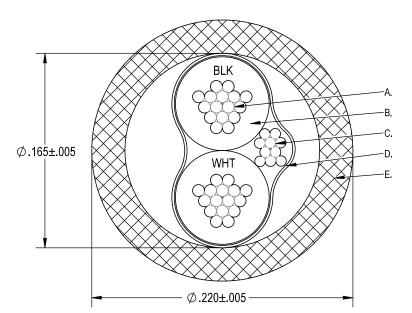

18 GAUGE 16x,010BC Α.


15 MIL POLYPROPYLENE INSUL PER AWM 10152 13 MIL MIN. POLYPROPYLENE INSULATION O.D. .079 ± .002 В.

20 GAUGE 10x.010BC DRAIN

ALUMINUM FOIL SHIELD: FOIL IN D.

25 MIL TUBED PVC JACKET 60C 300V 20 MIL MIN. PVC JACKET BLUE JACKET UL RECOGNIZED AND CSA CERTIFIED E.

ROHS3 DIRECTIVE (EU) 2015/863 TO AMEND ANNEX II TO EU ROHS 2, 2011/65/EU WITH NO EXEMPTIONS



ISOMETRIC VIEW FOR REFERENCE ONLY

LEGEND SPECIFICATIONS -

WHITE INK PRINT

OSCEOLA: WELDON TECHNOLOGIES V-MUX [logo8] P/N: 0L20-1600-00 RU AWM 80C 300V E54661 CSA AWM I/II A/B 80C 300V FT1 LL54185

SANTA TERESA: N/A

SHEET 1 OF 2

