
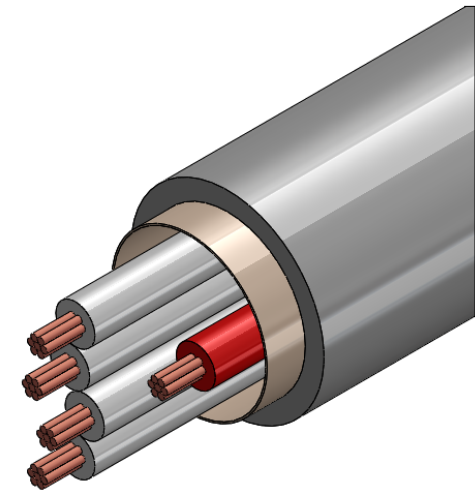



DESCRIPTION: 20/6 CABLE 80C 300V		UNITS: IN	SCALE: 8:1	ITEM	SPECIFICATIONS
CUSTOMER: IEWC	NWI P/N: FCAB206-072	DWG NO: 59116-1		A.	SUB ASSEMBLY TWISTED PAIR
CUSTOMER P/N: TBD	DRAWN BY: DP LANGER	DATE: 9/18/2015	REV: B	B.	20 GAUGE 7x.0126BC CONCENTRIC
CORE DIMENSIONS FOR INTERNAL USE ONLY				C.	16 MIL PVC INSULATION 80C 300V 13 MIL MIN. PVC INSULATION O.D. .072 ±.002
				D.	TISSUE PAPER SEPARATOR
				E.	30 MIL TUBED PVC JACKET 80C 300V 24 MIL MIN. PVC JACKET GRAY JACKET NO AGENCY APPROVALS
					ROHS COMPLIANT MATERIALS TO EU DIRECTIVE 2011/65/EU
					IRREGULARITIES (CONVOLUTIONS) OF THE CORE ASSEMBLY WILL BE SEEN THROUGH OUTER JACKET

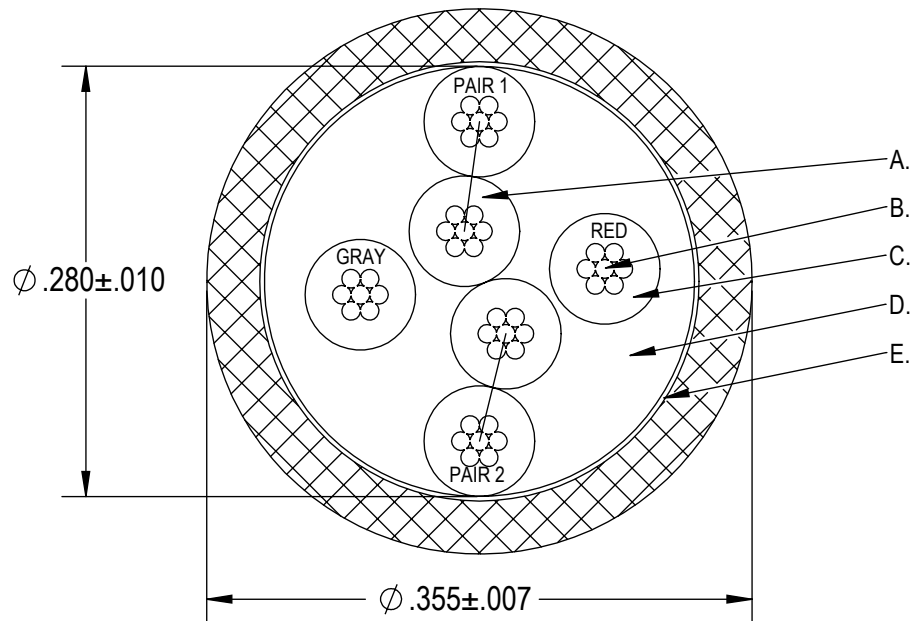

ISOMETRIC VIEW
FOR REFERENCE ONLY

LEGEND SPECIFICATIONS NO LEGEND ON CABLE

DESCRIPTION:		UNITS: IN	SCALE: 60:1	ITEM	SUB-ASSEMBLY SPECIFICATIONS
CUSTOMER: IEWC	NWI P/N: FCAB206-072	DWG NO: 59116-1		A.	20 GAUGE 7x.0126BC CONCENTRIC
CUSTOMER P/N: TBD	DRAWN BY: DP LANGER	DATE: 9/18/2015	REV: B	B.	16 MIL PVC INSULATION 80C 300V 13 MIL MIN. PVC INSULATION O.D. .072 ±.002

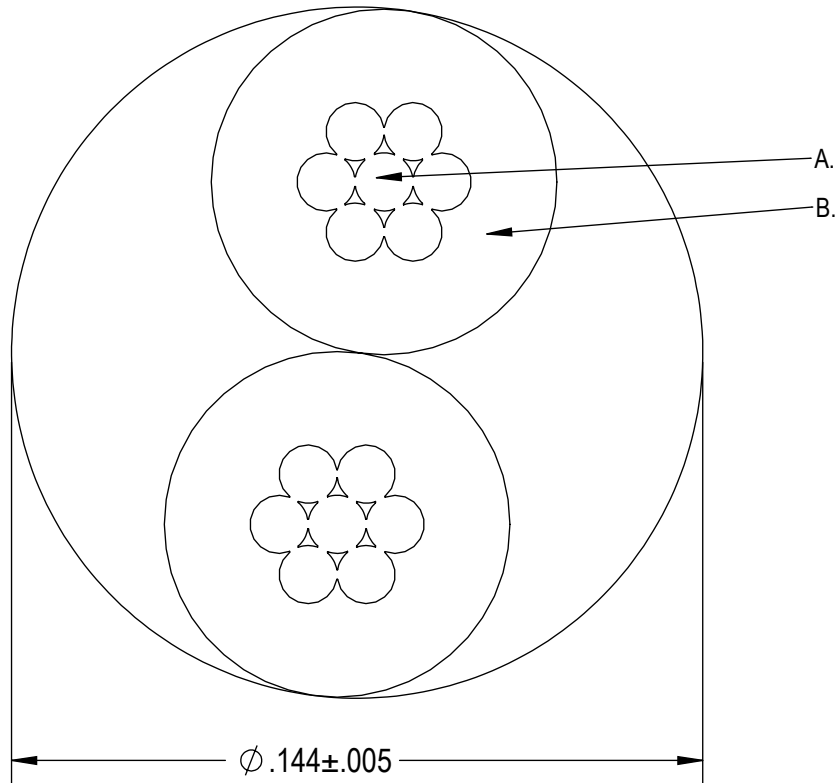

CONDUCTOR COLORS:
PAIR 1: BLUE, GREEN
PAIR 2: YELLOW, BROWN

DESCRIPTION:		UNITS: IN	SCALE: 60:1	ELECTRICAL REQUIREMENTS
CUSTOMER: IEWC	NWI P/N: FCAB206-072	DWG NO: 59116-1		NONE SPECIFIED
CUSTOMER P/N: TBD	DRAWN BY: DP LANGER	DATE: 9/18/2015	REV: B	



MECHANICAL REQUIREMENTS

NONE SPECIFIED

WAS PRESSURED JACKET; ADDED COMMENT CONCERNING FINISHED APPEARANCE	B	11/28/15	DPL
INITIAL RELEASE	A	9/18/15	DPL
REVISION RECORD	REV.	REV DATE	APR
REVISIONS			