


“Stay Connected” with



HEYware

a PennEngineering® Company

## Heyco® Nylon PCB Supports - Metric Spacing

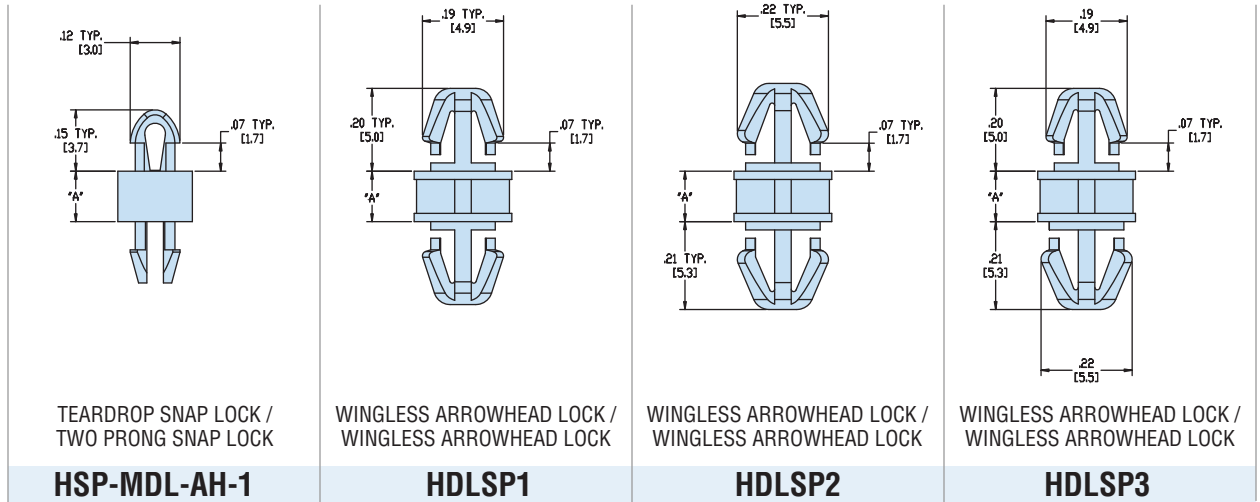

TEARDROP SNAP LOCK / TWO PRONG SNAP LOCK

WINGLESS ARROWHEAD LOCK / WINGLESS ARROWHEAD LOCK

WINGLESS ARROWHEAD LOCK / WINGLESS ARROWHEAD LOCK

WINGLESS ARROWHEAD LOCK / WINGLESS ARROWHEAD LOCK

**HSP-MDL-AH-1**

**HDLSP1**

**HDLSP2**

**HDLSP3**

	Maximum Thickness		Mounting Hole Diameter		Maximum Thickness		Mounting Hole Diameter		Maximum Thickness		Mounting Hole Diameter		Maximum Thickness		Mounting Hole Diameter	
	in.	mm.	in.	mm.	in.	mm.	in.	mm.	in.	mm.	in.	mm.	in.	mm.	in.	mm.
<b>PCB</b>	.062	1,6	.098	2,5	.062	1,6	.157	4,0	.062	1,6	.187	4,8	.062	1,6	.157	4,0
<b>Chassis</b>	.062	1,6	.098	2,5	.062	1,6	.157	4,0	.062	1,6	.187	4,8	.062	1,6	.187	4,8

A mm.	PART NO. Natural	DESCRIPTION	PART NO. Natural	DESCRIPTION	PART NO. Natural	DESCRIPTION	PART NO. Natural	DESCRIPTION
2,0	<b>10508</b>	HSP-MDL-AH-1-02M						
3,0	<b>10509</b>	HSP-MDL-AH-1-03M	<b>10523</b>	HDLSP1-03M	<b>10533</b>	HDLSP2-03M	<b>10543</b>	HDLSP3-03M
4,0	<b>10510</b>	HSP-MDL-AH-1-04M	<b>10524</b>	HDLSP1-04M	<b>10534</b>	HDLSP2-04M	<b>10544</b>	HDLSP3-04M
5,0	<b>10511</b>	HSP-MDL-AH-1-05M						
6,0	<b>10512</b>	HSP-MDL-AH-1-06M	<b>10525</b>	HDLSP1-06M	<b>10535</b>	HDLSP2-06M	<b>10545</b>	HDLSP3-06M
7,0	<b>10513</b>	HSP-MDL-AH-1-07M						
8,0	<b>10514</b>	HSP-MDL-AH-1-08M	<b>10526</b>	HDLSP1-08M	<b>10536</b>	HDLSP2-08M	<b>10546</b>	HDLSP3-08M
10,0	<b>10515</b>	HSP-MDL-AH-1-10M	<b>10527</b>	HDLSP1-10M	<b>10537</b>	HDLSP2-10M	<b>10547</b>	HDLSP3-10M
12,0	<b>10516</b>	HSP-MDL-AH-1-12M	<b>10528</b>	HDLSP1-12M	<b>10538</b>	HDLSP2-12M	<b>10548</b>	HDLSP3-12M
14,0	<b>10517</b>	HSP-MDL-AH-1-14M	<b>10529</b>	HDLSP1-14M	<b>10539</b>	HDLSP2-14M	<b>10549</b>	HDLSP3-14M
16,0	<b>10518</b>	HSP-MDL-AH-1-16M	<b>10530</b>	HDLSP1-16M	<b>10540</b>	HDLSP2-16M	<b>10550</b>	HDLSP3-16M
18,0	<b>10519</b>	HSP-MDL-AH-1-18M	<b>10531</b>	HDLSP1-18M	<b>10541</b>	HDLSP2-18M	<b>10551</b>	HDLSP3-18M
20,0	<b>10520</b>	HSP-MDL-AH-1-20M						
22,0	<b>10521</b>	HSP-MDL-AH-1-22M						

Standard color natural. For special order parts in UL 94V-0 natural material, add the suffix "F" to Part No.



Material: Nylon 6/6  
 Flammability Rating: 94V-2  
 Temperature Range: -40°F (-40°C) to 185°F (85°C)

*Quick Specs*