


Heyco® Nylon PCB Supports - Thru Hole Self-Retaining Spacers

- Large surface area base will not deform under heavy pre-load.
- One end locks into PCB.
- Clear hole variations for #4, #6 or #8 screw.

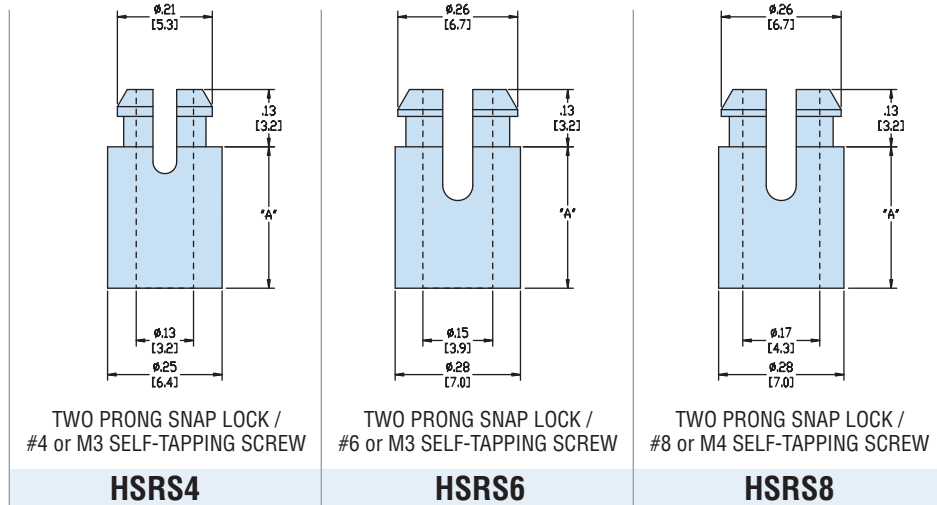

	Maximum Thickness †		Mounting Hole Diameter		Maximum Thickness †		Mounting Hole Diameter		Maximum Thickness †		Mounting Hole Diameter	
	in.	mm.	in.	mm.	in.	mm.	in.	mm.	in.	mm.	in.	mm.
PCB	.062	1,6	.187	4,7	.062	1,6	.232	5,9	.062	1,6	.232	5,9
Chassis	self-tapping		M3		self-tapping		M3		self-tapping		M4	

A		PART NO. Natural	DESCRIPTION	PART NO. Natural	DESCRIPTION	PART NO. Natural	DESCRIPTION
in.	mm.						
.125	3,2	10627	HSRS4-02				
.187	4,8	10628	HSRS4-03				
.250	6,4	10629	HSRS4-04	10639	HSRS6-04	10649	HSRS8-04
.312	7,9	10630	HSRS4-05	10640	HSRS6-05	10650	HSRS8-05
.375	9,5	10631	HSRS4-06	10641	HSRS6-06	10651	HSRS8-06
.437	11,1	10632	HSRS4-07	10642	HSRS6-07	10652	HSRS8-07
.500	12,7	10633	HSRS4-08	10643	HSRS6-08	10653	HSRS8-08
.625	15,9	10634	HSRS4-10	10644	HSRS6-10	10654	HSRS8-10
.750	19,1	10635	HSRS4-12	10645	HSRS6-12	10655	HSRS8-12
.875	22,2	10636	HSRS4-14	10646	HSRS6-14	10656	HSRS8-14
1.000	25,4	10637	HSRS4-16	10647	HSRS6-16	10657	HSRS8-16

Standard color natural. For special order parts in UL 94V-0 natural material, add the suffix “F” to Part No.

†Thread depth at Chassis end. For HRSR4, -6 and -8, thread depth = “A” dimension

Material: Nylon 6/6
 Flammability Rating: 94V-2
 Temperature Range: -40°F (-40°C) to 185°F (85°C)

Quick Specs