

Web site: [www.marinco.com](http://www.marinco.com)

Phone: 800-307-6702


Date: March, 2011 Rev: 01

Receptacle  
50A, 125/250V  
3-Pole, 4-Wire

### Catalog Number: CS6369

- Item: Receptacle, locking
- Rating: 50 amperes, 125/250 volts, 3-pole, 4-wire.
- Materials: All plastic parts are glass-filled, heat resistant nylon with a UL flammability rating of 94V-0.
- Terminals: Terminals have 5/16" screws with Perma-Lock™ collar to encapture the wire strands. The terminal screw does not bear down on the wire.
- Contacts: Solid brass, two-piece construction, secured by two solid rivets. Rigid half is 0.10" thick. Spring half is 0.04" thick.
- Listings: UL listed, File E111198  
CSA certified, File LR81290

#### Dimensions:

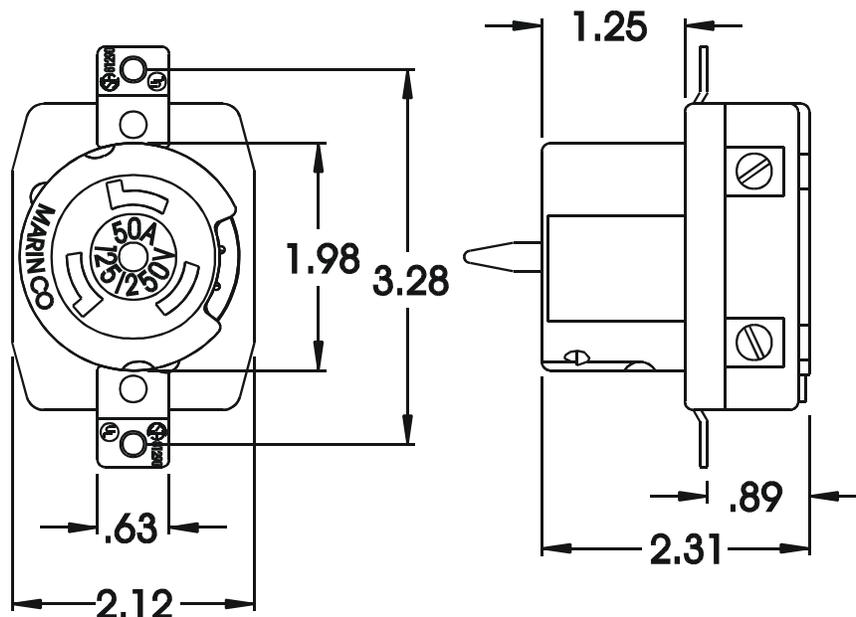

Dimensions shown in inches