


REV.	DESCRIPTION	DATE
0	PRELIMINARY RELEASE	8/18/2022
1	Corrected Print Legend	1/8/2024
2	Initial Release and Update Formatting	9/12/2025

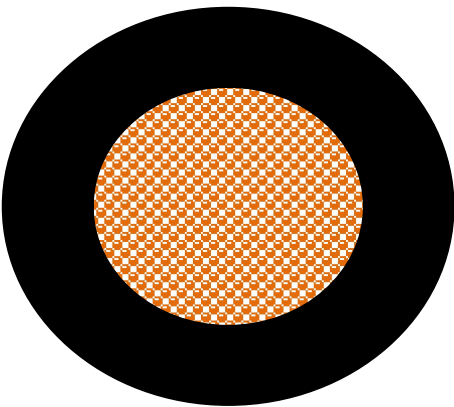

Dash	Color	Print
-001	White	Black
-002	White	Silver
-003	Red	Silver
-004	Black	Silver

Item	Component	Description	Thickness				Dimensions					
			<>	inch		mm		<>	inch		mm	
				Nom	Min	Nom	Min		Nom	Tol	Nom	Tol
1.	Conductor:	16 AWG 26/30 Tin Copper			NA	NA		0.057	0.005	1.45	0.13	
2.	Insulation:	EXAR 400		0.017	0.013	0.43	0.33		0.091	0.010	2.31	0.25

PRINT: XXXXX CHAMPLAIN (*) AWM STYLE 3266 125C 300V VW-1 CSA LL30433 CL1252 XLPE 125C 300V FT1 16 AWG

Print Legend: XXXXX = Audit Sheet Number
(*) = Underwriter's Symbol
Spacing = 24" Max Intervals
Print Color, Silver Oxide for -002, -003, -004

General Data
Voltage Rating: 300V
Temperature Range -40 to +125°C
UL Style: UL AWM 3266, 300V, 125C
in mm
Min Static Bend Radius 0.3 7



TITLE
16 AWG 26/30 TC EXAR 400 UL3266

Special Characterisits <S> Safety <D> Dimensional	DRN.	R. Antic	DATE	8/18/2022
	CKD.	J. Banfield	DATE	9/12/2025
DO NOT SCALE THIS DRAWING	SIZE A	PART NUMBER 15-07581-XXX	DOCUMENT NUMBER 19321	