

PRODUCT SPECIFICATION


DATE	REV	ECN	DESCRIPTION
9/21/2004	B	6383	ADDED CMA NOTE

Parent Number: **F2T017-**

Description: 2/0 7X19/20 BC SGT per J1127 105C Ink Print

DIAMETER: 0.583

TOLERANCE ± : 0.015

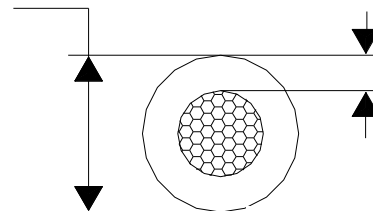

NOM WALL: 0.065

MINIMUM WALL: 0.045

Stranding: 7X19/20 BC Unilay

Style: SGT per J1127

Insulation: PVC

Print Legend: CF 2/0 AWG SAE J1127 TYPE SGT

Voltage: Per SAE J 1127 this product is intended for use at a nominal system voltage of 60 Volts DC or less in surface vehicle electrical systems.

Temperature: 105C

Notes: 1. Copper Conductor minimum CMA per SAE J1127 = 125,100

This product complies with European Directive 2015/863 -- RoHS 3.

The information presented here is, to the best of our knowledge, true and accurate. Since conditions of use are beyond Southwire's control all product data presented is for informational purposes only and does not create a binding obligation or liability on Southwire or confer any rights on any customer. The sale of product(s) is conditioned upon acceptance of a purchase order subject to Southwire's standard terms and conditions contained therein, including without limitation Southwire's standard warranty. Southwire disclaims all liability in connection with the use of information contained herein or otherwise.

This specification is proprietary intellectual property of Southwire Company, LLC. Any information contained herein shall not be disclosed to any party without written consent of Southwire Company, LLC.

Customer Approval:

Customer Part Nbr(s): _____

Approved By: _____ Date: _____

Title: _____ Company Name: _____



Southwire

Copperfield®

1115 W. North Street
Bremen, IN 46506

Phone: 1-574-546-5115