



This document contains proprietary and confidential information of Northwire, Inc. (and its subsidiary) and shall not be used, disclosed or reproduced, in whole or in part, for any purpose without the prior written consent of Northwire, Inc. (and its subsidiary).


Disclaimer: The technical data that is made part of this document may be subject to the International Traffic in Arms Regulation (ITAR) and the Export Administration Regulations (EAR). Disclosure of technical data to Foreign Persons in the course of employment with U.S. contractors is considered an export and is subject to the ITAR and EAR export

NORTHWIRE P/N: FCAB2610-004 CUSTOMER: IEWC CUSTOMER P/N: 32159986

APPR BY: NN REVD BY: **GM** DWG NO: 79674-1 DRAWN BY: DP LANGER DATE: 1/18/2022 REV: C

CORE DIMENSIONS FOR INTERNAL USE ONLY

DESCRIPTION: 26/10 CABLE 105C 300V

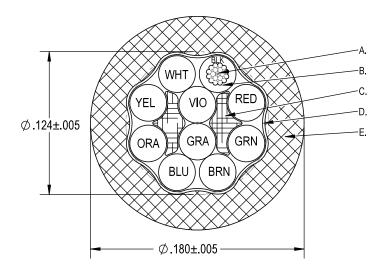

26 GAUGE 19x,004TC Α.


5.5 MIL POLYETHYLENE INSULATION 80C 300V 5 MIL MIN. POLYETHYLENE INSULATION O.D. .031 ±.001 В.

C. POLY FILLER

TISSUE PAPER SEPARATOR D.

20 MIL PRESSURED PVC JACKET 105C 300V 15 MIL MIN, PVC JACKET GRAY JACKET GLOSSY FINISH ON JACKET NO AGENCY APPROVALS E.

ROHS3 DIRECTIVE (EU) 2015/863 TO AMEND ANNEX II TO EU ROHS 2, 2011/65/EU WITH NO EXEMPTIONS



LEGEND SPECIFICATIONS -

BLACK INK PRINT

OSCEOLA: N/A

SANTA TERESA: 101137 NH3 10C26

SHEET 1 OF 2

