


Technical Data Sheet:	DS354-3
Product Description	Coupler conduit fitting, FPA to FPA
Product Range	FPA / FPA Nylon Coupler

Atkore™ Flexicon



www.atkore.com/flexicon

• FPA fittings - IP66

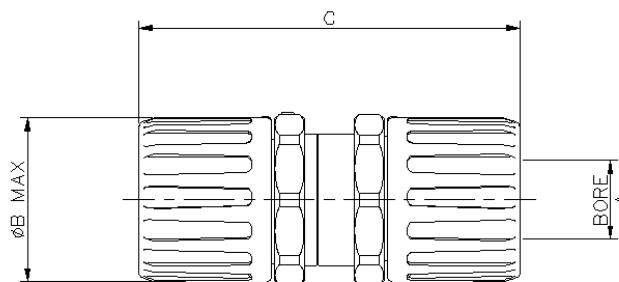

Material:
Nylon PA66

Colour:
Black

Fire Performance:
Extra Low Fire Hazard
- Halogen, Sulphur & Phosphorous Free

For full details of fire performance details of PA66 fittings see data sheet reference DS601

IP Rating:

• IP66
(NB: For higher IP ratings see FPAX & FPAU fittings)

Applications:

Suitable for connecting two conduit systems.

Features:

- UV Resistant - Black
- Fast Fit
- Anti vibration & Tamper Resistant
- High tensile strength due to all round retaining teeth 40kg with FPAS21
- Can be removed using a screwdriver

Temperature Performance:

-50°C to +135°C

Conduit Size	Part No.	Dimension (mm)		
		A	B	C
16	FPA16-FPA16#	11.7	29	69.5
20	FPA20-FPA20#	15.3	32	70.5
21	FPA21-FPA21#	15.3	32	71.0
25	FPA25-FPA25#	20.3	39	80.0
28	FPA28-FPA28#	20.3	44	81.0
34	FPA34-FPA34#	27.0	51	87.0
42	FPA42-FPA42#	33.5	63	101.0
54	FPA54-FPA54#	40.7	76	113.0

NB: # Add B for Black or G for Grey

Compliance, Approvals & Accreditation;



EN 61386 Classification Available on request

File No. E229161

Vibration and Shock resistant to EN 61373 Cat 2

Typical Applications;



Construction



Rail



Machinery and OEM's



Defence

Errors, omissions and amendments excepted. As part of continuing product development Flexicon Ltd reserve the right to alter product specifications without prior notice. Data given is correct at time of compilation. Product specification and application data is for guidance only and does not constitute a warranty of any kind, either expressed or implied for Flexicon products or their suitability for a specific purpose. Third party approvals maybe limited to certain sizes within a product range.

Created by; Colin Legg - Marketing Director	Approved by; Alex Smith - Technical Director	Date; July 2023	Page Number; Page 1 of 1
---	--	---------------------------	------------------------------------