


2 CONDUCTOR 14 AWG GPT CABLE

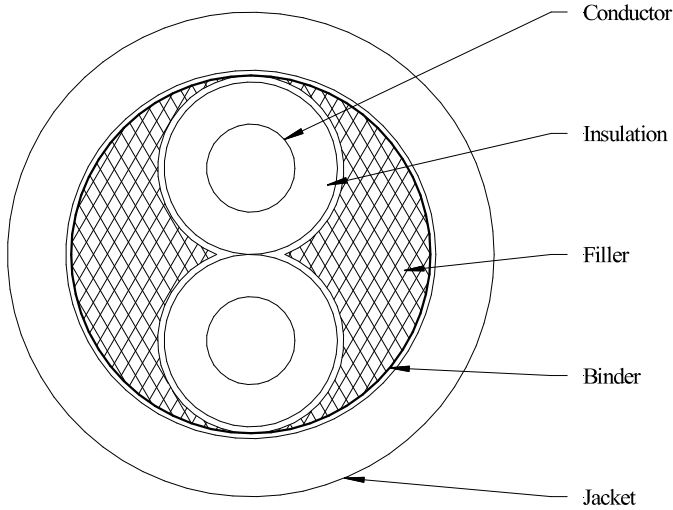

CONSTRUCTION

Single Component

Conductor: 14 AWG 41/30 Bare Copper, 0.074 Inch Diameter

Insulation: 0.032 Inches of PVC, 0.138 Inch Diameter

Final Assembly

Core: 2 Singles (#1 – 2) Cabled Together with Fibrillated Polypropylene Filler in
Each Interstice

Binder: Non-Woven Tape, 25% Overlap

Jacket: 0.035 Inches of PVC, Color – Black

Diameter: 0.350 Inches Nominal

Print Legend: None

COLOR CODE

Conductor #	Insulation Color	Tracer Color
1	White	
2	White	Black


ELECTRICAL CHARACTERISTICS

Conductor DC Resistance: 2.7 Ohms/1000 ft Nominal @ 20°C

SAFETY CERTIFICATION

RoHS Compliance: In accordance with current amendments of EU Directive
2011/65/EU for the Restriction of Hazardous Substance

REACH Compliance: In accordance with the current candidate list from Regulation
(EC) No 1907/2006 Article 33(1) of the European Parliament and of the
Council, dated 18 December 2006, concerning the Registration,
Evaluation, Authorisation and Restriction of Chemicals



134 Ferry Street
South Grafton, MA 01560
Tel: (508) 234-6372

REVISION HISTORY

1	09/15/25	BF	Initial Release

Spec Number: 8449

Part Number:

Customer: IEWC Global Solutions

Customer #:

Prepared By: B. Fleming

Reviewed By: B. Harvie

Page

1 of 1

Hueson Wire & Cable reserves the right to make changes in materials or processing without notification to the Buyer, which do not affect compliance with any specification.