

Hot Melt Tape for Heat Shrinkable Tubing and Shapes

• HMT200A

Features and Benefits

The hot melt tape flows when heated and provides permanent airtight and watertight seals.

Application

Designed for use with heat shrinkable sleeving and mouldings.

Application Method

1. Clean and prepare the bonding areas.*
2. Wrap the tape around the part and overlap.*
3. Put the tubing or heat shrinkable shape over the tape and shrink down.*


*As per installation guide



HMT200A tape.



Adhesive tape HMT200A for sealing against humidity.

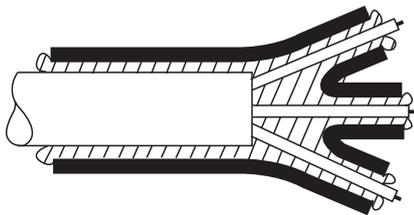

HMT200A

Material Data	
Material	Ethylenevinylacetate (EVA)
Colour	Transparent (CL)
Operating Temperature	-55 °C to +105 °C
Melting Point	starting from +95 °C



Technical Table				
Article-No.	Type	Thickness (T)	Width (W)	Reel Length (m)
354-02259	HMT200A	0.25	25.0	50
354-02260	HMT200A	0.25	25.0	10

All dimensions in mm. Subject to technical changes.