

1) CONSTRUCTION:	NOM. DIA.
CONDUCTOR: 18 AWG 16/30 STRANDED TINNED COPPER	.045"
INSULATION: LEAD FREE POLYVINYLCHLORIDE, .016" NOM. WALL THICKNESS	.077"
CABLE: (15) INSULATED CONDUCTORS TWISTED TOGETHER WRAPPED WITH A CLEAR POLYESTER BINDER TO FORM A CABLE CORE.	.364"
JACKET: LEAD FREE POLYVINYLCHLORIDE, CHROME GRAY, .040" NOM. WALL THICKNESS	OVERALL CABLE DIAMETER .444"

2) PHYSICAL PROPERTIES:  
 TEMPERATURE RATING, MAX. 60°C, 80°C & 105°C  
 WT./M', NOM., NET. 139.4 LBS.

3) ELECTRICAL CHARACTERISTICS:  
 CAPACITANCE, MUTUAL, NOM. 25 PF/FT.  
 DIELECTRIC WITHSTANDING, MIN 2000V RMS  
 VOLTAGE RATING, MAX. 600V  
 D.C. RESISTANCE, MAX. PER ASTM B286 7.15 OHMS/M'


4) AGENCY APPROVALS:  
 NEC (UL) TYPE CM  
 UL STYLE 2464  
 UL STYLE 2586  
 CSA AWM FT4


5) APPLICATION:  
 INSTRUMENTATION, AUDIO, AND CONTROL CABLE. RoHS COMPLIANT MATERIALS.

6) PRINT:  
 QUABBIN 4125R (UL) TYPE CM 18 AWG OR AWM 2464 80C 300V OR AWM 2586 105C 600V -- CSA LL51726  
 AWM I/II A/B 105C 600V FT4 -- RoHS -- **(LOT DESIGNATOR)**

- 7) COLOR CODE:
1. BLACK
  2. WHITE
  3. RED
  4. GREEN
  5. ORANGE
  6. BLUE
  7. WHITE/BLACK
  8. RED/BLACK
  9. GREEN/BLACK
  10. ORANGE/BLACK
  11. BLUE/BLACK
  12. BLACK/WHITE
  13. RED/WHITE
  14. GREEN/WHITE
  15. BLUE/WHITE

8) PACKAGING:  
 TO BE PACKAGED AS PER QWC'S  
 STANDARD PACKAGING

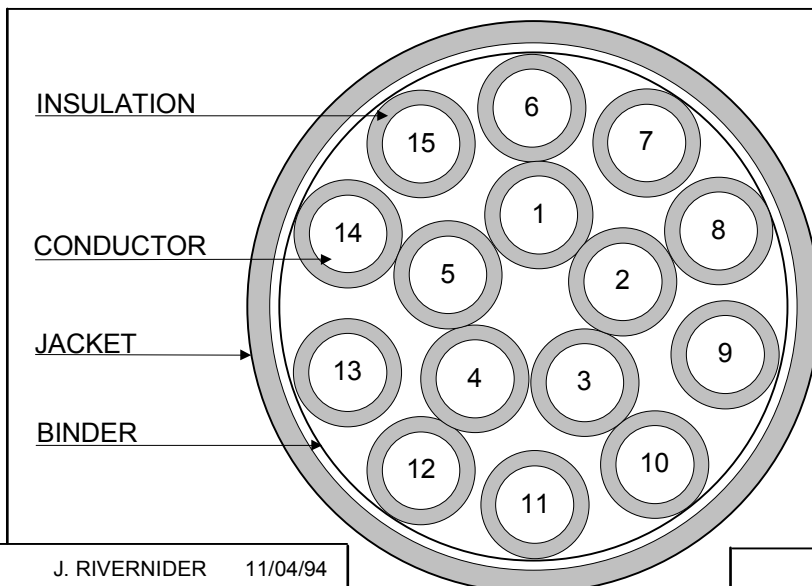

REVISION 05	DATE:	DRAWN J. RIVERNIDER 11/04/94	
REVISED BY	B. DUCZYNSKI 5/11/05	CHECKED G. MELNIK 11/07/94	
CHECKED	J. RIVERNIDER 5/12/05	CHECKED	 TITLE 15/C 18 AWG PVC/PVC CABLE -- TYPE CM, STYLE 2464, STYLE 2586, CSA AWM FT4
CHECKED		CUSTOMER APPROVAL: DATE:	
			QUABBIN P/N 4125 1 OF 1