


PRODUCT SPECIFICATION

<i>DATE</i>	<i>REV</i>	<i>ECN</i>	<i>DESCRIPTION</i>
2/4/2013	B		ADDED VOLTAGE & TEMP

Parent Number: F20120-

Description: 20 7/.0126 Stainless Steel Braided Silicone

DIAMETER: 0.259
TOLERANCE ±: 0.003

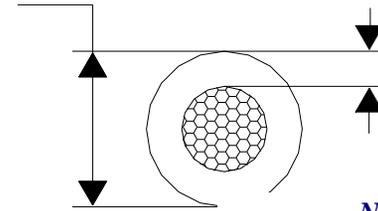

Stranding: 7/.0126 Stainless Steel

Style: Braided Silicone

NOM WALL: 0.104

MINIMUM WALL: 0.090

Insulation: Silicone w/Braid

Print Legend: NO PRINT

Voltage: 600V

Temperature: 200C

- Notes:**
1. NOMINAL OD SPECIFIED ABOVE IS THE OVERALL OD OVER THE BRAID.
 2. OD under the braid is 0.247" +/- 0.003"

The information presented here is, to the best of our knowledge, true and accurate. Since conditions of use are beyond Coleman Cable's control all product data presented is for informational purposes only and does not create a binding obligation or liability on Coleman Cable or confer any rights on any customer. The sale of product(s) is conditioned upon acceptance of a purchase order subject to Coleman Cable's standard terms and conditions contained therein, including without limitation Coleman Cable's standard warranty. Coleman cable disclaims all liability in connection with the use of information contained herein or otherwise.

This specification is proprietary intellectual property of Coleman Cable. Any information contained herein shall not be disclosed to any party without written consent of Coleman Cable.

Customer Approval:

Customer Part Nbr(s): _____

Approved By: _____ **Date:** _____

Title: _____ **Company Name:** _____

COLEMAN CABLE, INC

1530 Shields Drive
Waukegan, IL 60085

Phone: 1-800-323-9355

www.colemancable.com

