



ABRASION/MECHANICAL

ROUNDIT® 2000 NX HT


Product Highlights

- Operating temperature from -70°C to +260°C (-94°F to +500°F)
- ASD EN 6049-007
- Excellent cut-through and abrasion resistance
- Halogen-free
- Self-wrapping design
- Ideal for reworking components without disconnecting them
- Lightweight construction
- Tracer indicating the maximum operating diameter
- Aesthetic solution
- Oil and water repellent



Our manufacturing sites are certified ISO 9001, ISO/TS 16949, or AS/EN 9100, and ISO 14001

R12000NXHT_01112012

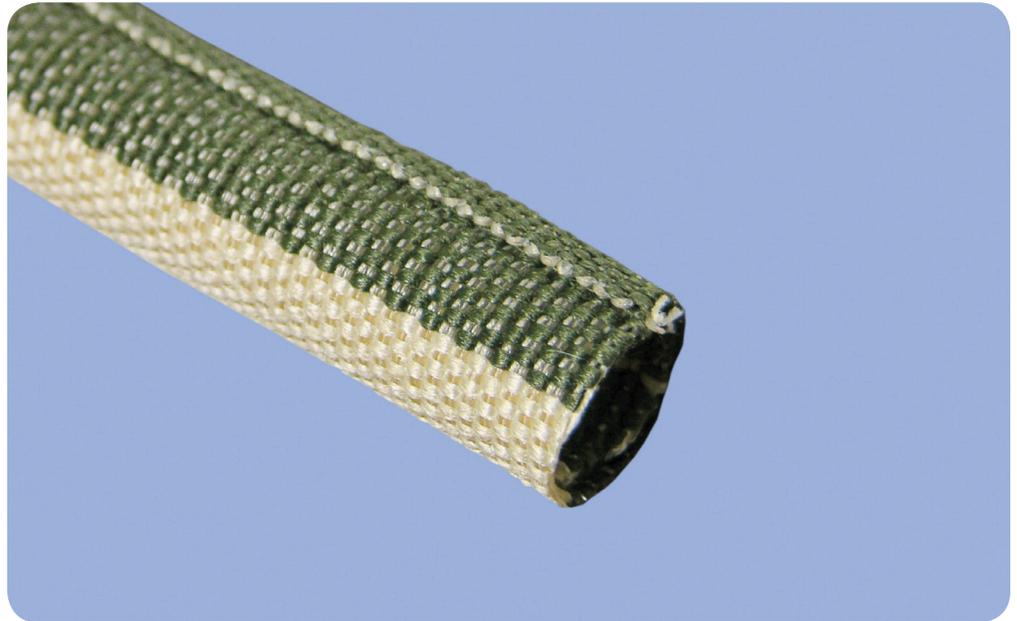

ROUNDIT® 2000 NX HT is a self-wrapping sleeve manufactured from PEEK monofilaments and Nomex® multifilaments. It includes an oil and water repellent treatment in order to prevent the absorption of condensation build-up caused by the extreme changes aircraft are subjected to. Designed for mechanical protection and maintenance of wire and cable bundles, its 100% covering ratio provides excellent cut-through and abrasion resistance.

The self-wrapping design allows for quick and easy installation and removal of the product for assembly and maintenance. ROUNDIT 2000 NX HT also accommodates break cuts.

The high temperature version is differentiated from the standard ROUNDIT 2000 NX by a wide ivory tracer on the outer side.



As an added benefit, the patented ROUNDIT® Tool will help improve installation time and is designed to install ROUNDIT® products on cable and wire configurations.

Nomex is a registered trademark of E.I. DuPont de Nemours.

BentleyHarris®
Protection Products