
27 MILS MIN. PVC INSULATION 27 MILS MIN. PVC INSULATION O D 140: 000° 074417417517 017 000°	CUSTOMER P/N: SJT1803-Z/105C	SUSTOMER: IEWC CUST	CU
18 GAU	DPL NWI P/N: FSJT183-254 A. 18 GAUGE 16x30BC	SCALE: 20x DATE: 2/24/12 DR. BY:	Sc.
M SPECS.	DWG NO: FSJT183-254 ITEM SPECS.	DESC:18/3 SJT 105C 300V	MORTHWIRE DE

This document contains proprietary and confidential information of Northwire, Inc. (and its subsidiary) and shall not be used, disclosed or reproduced, in whole or in part, for any purpose without the prior written consent of Northwire, Inc. (and its subsidiary).

Disclaimer: The technical data that is made part of this document may be subject to the International Traffic in Arms Regulation (ITAR) and the Export Administration Regulations (EAR). Disclosure of technical data to Foreign Persons in the course of employment with U.S. contractors is considered an export and is subject to the ITAR and EAR export licensing requirements/regulations.

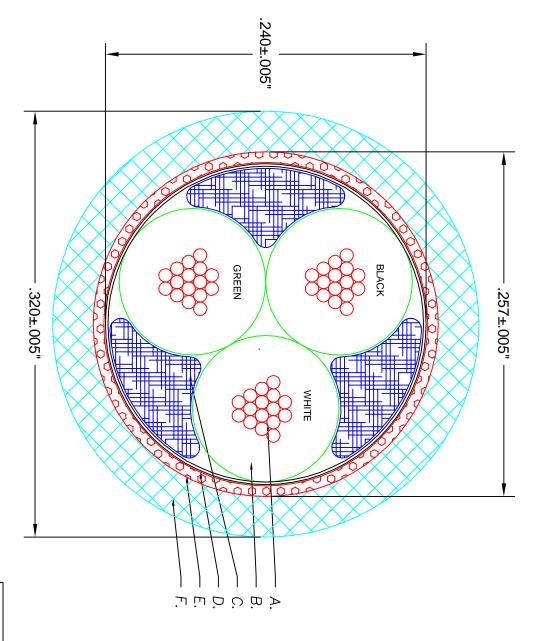

ĪĒM	ITEM SPECS.
₽.>	30 MILS PVC INSULATION 105C 300V
	27 MILS MIN. PVC INSULATION
	O.D110±.002" STANDARD SJT CONDUCTOR
ဂ	
Ö	OPAQUE MYLAR WRAP
	20% MIN. OVERLAP 100% COVERAGE
ÌШ	85% MIN. TC BRAID SHIELD
	38 AWG SINGLE ENDS
т.	30 MILS PRESSURED PVC JACKET 105C :
	24 MILS MIN. PVC JACKET CLEAR JACKET
	UL AND CSA APPROVED
	JACKET WILL MIGRATE SOME INTO THE BRAID
	JACKET REMOVAL WILL BE A LITTLE DIFFICULT

ELECTRICAL REQUIREMENTS:

DUE TO THIS

NONE SPECIFIED

MECHANICAL REQUIREMENTS:

BRAID IS USED FOR DEOCRATIVE PURPOSES ONLY;
ARCHITECTURAL LIGHTING APPLICATION

CORE DIMENSIONS FOR INTERNAL USE ONLY

LEGEND IN WHITE INK: (UL) E53042
3/C 18 AWG (
.824mm2) S
SJT 105C 300V FT2
CSA LL30875

INITIAL RELEASE	ADDED CUSTOMER PART NUMBER	REMOVED VW-1
Α	В	С
2/24/12	2/27/12	3/9/12
DPL	DPL	DPL
	INITIAL RELEASE A 2/24/12 DPL	A B



RoHS Certification of Conformance

Customer:	IEWC		
Northwire Part Number:	FS.IT183-254		
- 10-0-11	1 201 100 10 1		
Product Description:	Cbl 18/3 SJT 105C Clr 1	6x30B	
We hereby certify that the specifications as listed:	ese products were manu	ifactured to comply v	vith the
RoH	S compliant material is	used for this product	:
Justin Washl	niirn	Date:	12/14/12
Northwire Quality Assur			12117112