

# Suflex<sup>®</sup> Silverflex

## Heat Treated Fiberglass Sleevings


**Temp Class:** Class C (240°+ C)

**Material:** Heat Treated Fiberglass

**Sizes Available:** AWG #24 through 1" I.D.

**Colors Available:** Natural (Unsaturated), Black, Red, Clear, Yellow (Saturated)

**Applicable Standards:** UL Recognized Component for VW-1 Flame Rating under file no. E15253, NEMA TF-2 Type 3

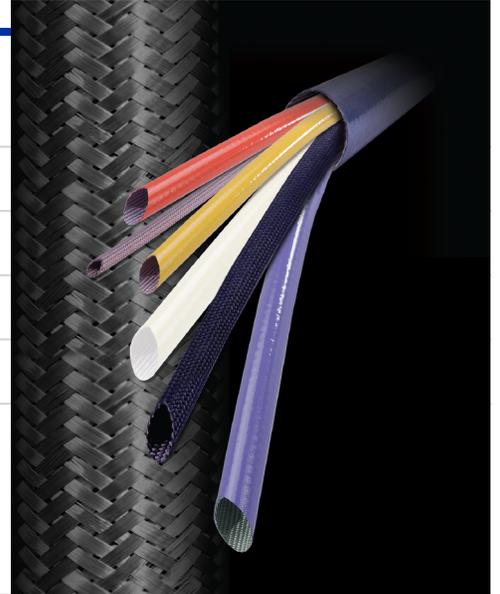

## Features

- ▶ Maximum flexibility and temperature rating.
- ▶ Available unsaturated, impregnated with an acrylic binder (T&D, T&D C3) or heavy wall (1/32).
- ▶ Expandable, enabling it to be slipped over irregular profiles.
- ▶ T&D can be supplied in a variety of colors by request.

## Product Description

Suflex Silverflex is a braided fiberglass sleeving which has been heat treated (natural) or heat treated and impregnated (T&D for treated and dyed) with an acrylic binder. It is custom-braided designed specifically for applications where temperatures as high as 1200°F are encountered. For low-voltage applications, especially those involving heat, Suflex Silverflex fiberglass sleeving provides a sturdy, long-lasting and inexpensive insulation.

## Suggested Applications

Suflex Silverflex is used where space factor electrical insulation is sufficient, particular where high temperatures are encountered. It used as primary insulation on low voltage applications such as leads in toasters, hot plates, hand irons, coffee makers, range units, percolators, deep-fry vessels and other appliances. The heat treatment applied during production gives Suflex Silverflex non-fraying properties that make it ideal for applications where short lengths are used.

# Suflex<sup>®</sup> Silverflex

## Sizes Available

Size	Inside Diameter, in. (mm)		Nominal I.D.
	Maximum	Minimum	
24 AWG	0.027 (0.69)	0.020 (0.51)	0.022
22 AWG	0.032 (0.81)	0.025 (0.64)	0.027
20 AWG	0.039 (0.99)	0.032 (0.81)	0.034
19 AWG	0.044 (1.11)	0.036 (0.91)	0.040
18 AWG	0.049 (1.25)	0.040 (1.02)	0.042
17 AWG	0.054 (1.37)	0.045 (1.14)	0.047
16 AWG	0.061 (1.55)	0.051 (1.30)	0.053
15 AWG	0.067 (1.70)	0.057 (1.45)	0.059
14 AWG	0.074 (1.88)	0.064 (1.63)	0.066
13 AWG	0.082 (2.08)	0.072 (1.83)	0.076
12 AWG	0.091 (2.31)	0.081 (2.06)	0.085
11 AWG	0.101 (2.60)	0.091 (2.31)	0.095
10 AWG	0.112 (2.80)	0.102 (2.60)	0.106
9 AWG	0.124 (3.20)	0.114 (2.90)	0.118
8 AWG	0.141 (3.60)	0.129 (3.30)	0.133
7 AWG	0.158 (4.00)	0.144 (3.70)	0.148
6 AWG	0.178 (4.50)	0.152 (4.10)	0.166
5 AWG	0.198 (5.00)	0.182 (4.60)	0.186
4 AWG	0.224 (5.70)	0.204 (5.20)	0.208
3 AWG	0.249 (6.30)	0.229 (5.80)	0.234
2 AWG	0.278 (7.10)	0.258 (6.60)	0.263
1 AWG	0.311 (7.90)	0.289 (7.30)	0.294
0 AWG	0.347 (8.80)	0.325 (8.30)	0.330
3/8"	0.399 (10.10)	0.375 (9.50)	0.375
7/16"	0.462 (11.70)	0.438 (11.10)	0.438
1/2"	0.524 (13.30)	0.500 (12.70)	0.500
5/8"	0.655 (16.70)	0.625 (15.90)	0.625
3/4"	0.786 (20.00)	0.750 (19.10)	0.750
7/8"	0.911 (23.20)	0.875 (22.20)	0.875
1"	1.036 (26.30)	1.000 (25.40)	1.000

\*All Atkins & Pearce coated insulation solutions are REACH and RoHS compliant.