


Technical Data Sheet:	DS243-3
Product Description	Zinc Locknuts - (NPT)
Product Range	Accessories - Zinc Locknut

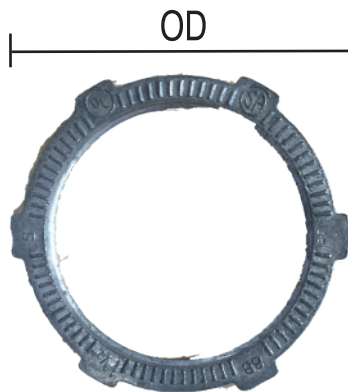

Material:
Zinc Diecast

Colour:
Self colour

Fire Performance:
Low Fire Hazard



IP Rating:
N/A

Applications:
Used to secure a fitting when used with non threaded entries.

Sharp corners ensure security on vibrating machinery.

Temperature Performance:

-50°C to +200°C

Thread Size	Part No.	Nominal Dimensions (mm)		Number of castellations
		OD	Thickness	
½" NPT	Z-050	27.8	4.1	8
¾" NPT	Z-075	35.8	4.6	8
1" NPT	Z-100	42.6	5.8	8
1 ¼" NPT	Z-125	52.2	5.4	8
1 ½" NPT	Z-150	60.6	5.7	6
2" NPT	Z-200	73.5	6.2	8

Compliance, Approvals & Accreditation;



EN 61386 Classification Available on request

Typical Applications;



Construction



Rail



Machinery and OEM's



Defence

Errors, omissions and amendments excepted. As part of continuing product development Flexicon Ltd reserve the right to alter product specifications without prior notice. Data given is correct at time of compilation. Product specification and application data is for guidance only and does not constitute a warranty of any kind, either expressed or implied for Flexicon products or their suitability for a specific purpose. Third party approvals maybe limited to certain sizes within a product range.

Created by; Colin Legg- Marketing Director	Approved by; Alex Smith - Technical Director	Date; July 2023	Page Number; Page 1 of 1
--	--	---------------------------	------------------------------------