



PART NUMBER:
i2753-A-XX-XJ

NOTES:
1) SPC GR-326 GEOMETRIC
REQUIREMENTS =>PROTRUSION/UNDERCUT:+50/-100nm

PERFORMANCE SPECIFICATIONS	
FIBER TYPE: SINGLEMODE (8.33/125um)	
	1310/1550nm
INSERTION LOSS	0.3dB
TYPICAL INSERTION LOSS	0.15dB
BACK REFLECTION	≤-55dB ABOVE
BACK REFLECTION (Typical)	≤-65dB ABOVE
MATING DURABILITY (500 cycles)	<0.2dB
TEMPERATURE RANGE	-40° C to 85° C

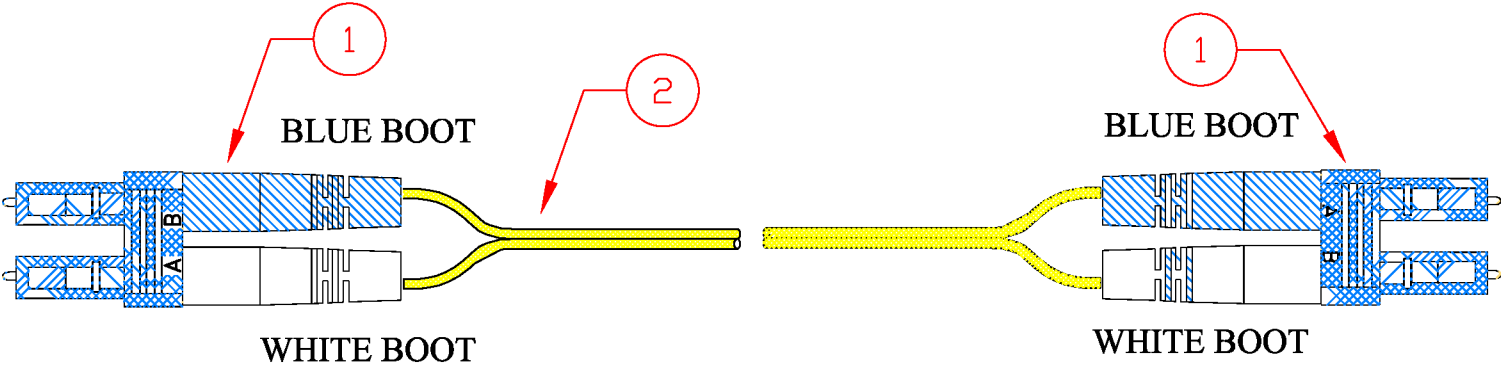

CORNING SMF28 ULTRA OPTICAL FIBER CABLE 8.33/125um ZIPCORD OFNR/OFNP
AVAILABLE IN 2.0, 1.8, 1.6, and 1.2mm

ITEM	QTY.	DESCRIPTION	PROPRIETARY AND CONFIDENTIAL THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF iFIBER OPTIX, INC. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION IS PROHIBITED.	DRAWN BY:	DATE:	 iFIBER OPTIX, INC. 14450 CHAMBERS RD. TUSTIN, CA 92780 PART NUMBER: i2753-A-XX-XJ	www.ifiberoptix.com Tel: 714-665-9796 Fax: 714-665-9757
1		LC/UPC SINGLEMODE DUPLEX 126um CONNECTOR		CHECKED BY:	DATE:		
2		CORNING SINGLEMODE 8.33/125um 2mm		APPROVED BY:	DATE:		
3		N/A		TITLE:			
4		N/A		LC/UPC-LC/UPC SM DX 8.33/125um OFNR 2mm			
					P/N: LEGEND N = INCHES F = FEET M = METER		