
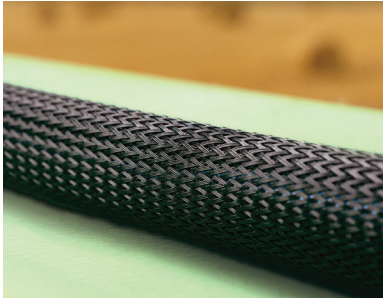


- **Specialized Lightweight Resin Coating**
- **Will Not Fray When Cut With Scissors**
- **Expands Up To 150%**
- **Versatility Of Installation**
- **High Abrasion Resistance**

Flexo® PET Plus with Fray Resistant Resin Coating

The FLEXO® PET PLUS (PTP) has all the qualities of our legendary Flexo® PET, plus a highly specialized, fray-resistant resin coating that facilitates easy cutting with scissors. Flexo® PET Plus is an elegant and economical choice for projects that call for versatility of installation and for situations where access to a hot knife is impossible.

It cuts easily and cleanly with ordinary scissors. In addition, Flexo® PET Plus has a wide operating temperature range and is resistant to chemical degradation, UV radiation, and abrasion.

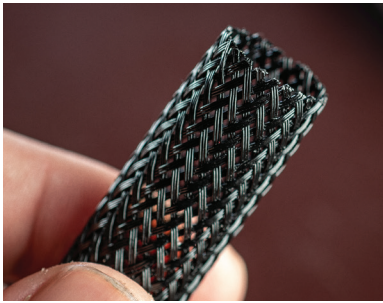

Nominal Size	Part #	Expansion Range		Standard Spool Put-Ups		Available Colors	Lbs/100'
		Min.	Max.	Bulk Spool	Shop Spool		
1/8"	PTP0.13BK	1/16"	1/4"	1,000'	225'	Black (BK)	0.2
1/4"	PTP0.25BK	1/8"	3/8"	1,000'	200'	Black (BK)	0.3
3/8"	PTP0.38BK	3/16"	5/8"	500'	125'	Black (BK)	0.6
1/2"	PTP0.50BK	1/4"	3/4"	500'	100'	Black (BK)	0.8
5/8"	PTP0.63BK	3/8"	1 1/8"	500'	100'	Black (BK)	0.9
3/4"	PTP0.75BK	1/2"	1 1/4"	250'	75'	Black (BK)	1.2
1 1/4"	PTP1.25BK	3/4"	1 1/2"	250'	50'	Black (BK)	1.6
1 1/2"	PTP1.50BK	1"	1 3/4"	200'	40'	Black (BK)	2.5
1 3/4"	PTP1.75BK	1 1/4"	2 3/4"	200'	30'	Black (BK)	2.7
2"	PTP2.00BK	1 1/2"	3 1/2"	200'	50'	Black (BK)	2.8