

CAT. No.

57110


IEC 60320 (C-20) PLUG, 20 AMPERE 250 VOLT (UL/CSA), 16 AMPERE 250 VOLT (VDE, CCC, ENEC 10), 2 POLE-3 WIRE GROUNDING. BLACK. TERMINALS ACCEPT 14 AWG (2.1 mm) OR 12 AWG (4.0 mm) CONDUCTORS, (0.325/0.395) DIA. CORDAGE. BODY MATERIAL= POLYAMIDE 6 (NYLON).

APPROVALS	VDE <input checked="" type="checkbox"/>	CCC <input checked="" type="checkbox"/>	UL FILE #E96454 <input checked="" type="checkbox"/>	ENEC 10 <input checked="" type="checkbox"/>
CERTIFICATIONS	REACH <input checked="" type="checkbox"/>	ROHS <input checked="" type="checkbox"/>	CE <input checked="" type="checkbox"/>	
STANDARDS	IEC 60320 C-20 <input checked="" type="checkbox"/>	UL 498 <input checked="" type="checkbox"/>		


ALL DIMENSIONS ARE IN MILLIMETERS

MAXIMUM JACKET O.D. ACCEPTED BY EXTERNAL STRAIN RELIEF = 9 DIA (0.325")  
 MAXIMUM JACKET O.D. ACCEPTED BY INTERNAL STRAIN RELIEF = 10 DIA (0.395")  
 MAXIMUM CONDUCTOR SIZE ACCEPTED BY TERMINALS = 4.0 (12 AWG)


CORDAGE PREPARATION			
CONDUCTOR INSULATION COLOR	CONDUCTOR COLOR CODE	"LENGTH"	"STRIP"
GREEN/YELLOW	GROUND	20	6
BLUE	NEUTRAL	25	6
BROWN	LINE	25	6

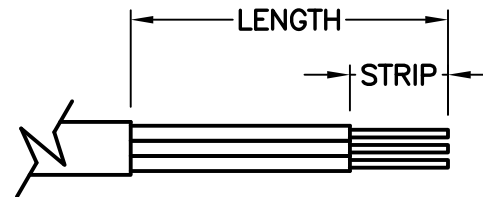

CORDAGE PREPARATION

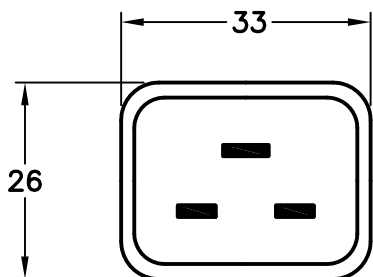

IEC 60320 C-20  
FRONT VIEW

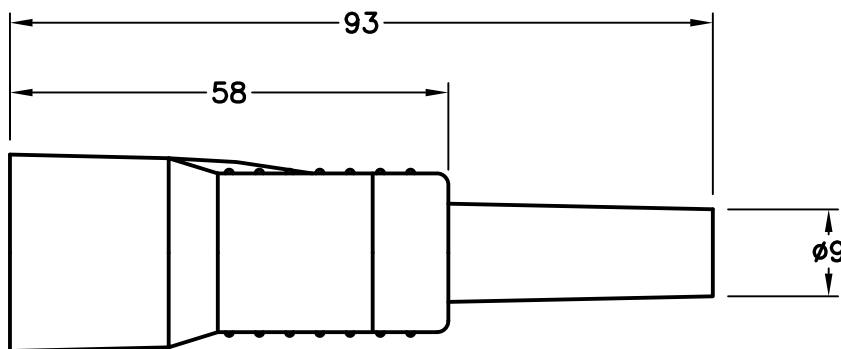

SIDE VIEW