


U.I. Lapp GmbH	PRODUCT INFORMATION	
	EPIC® H-B 16 TG-RO	05.11.2015

Housing design H-B. The industry standard.
The housing standard. Wide choice for all applications



Automation & fältinstallation



Industrial machinery and plant engineering



Mechanical resistance



Robust



Waterproof



Info

Non-slip ridges for comfortable disconnecting

Application range

Plant engineering
Light & sound technology
Plastics industry

Product features

Hood, low version
Reels for single lever
Straight cable entry
Versions with / without neck

Remark

Photographs are not to scale and do not represent detailed images of the respective products.

Technical Data

Material:	Housing: powder-coated aluminium alloy, grey Lever: zinc-plated steel Sealing: NBR
Protection rating:	IP 65 (latched)
Temperature range:	-40°C to +100°C, short-term up to +125°C


Product Management	Document: LAPP_PRO410EN.pdf	1 / 3
--------------------	-----------------------------	-------





EPIC® H-B 16 TG-RO

05.11.2015

Part number	Article description	M	PG	Neck	Pieces / PU
H-B housing: hood (straight cable entry, bolts for single lever)					
10080900	H-B 16 TG-RO 21		21	yes	5
19080900	H-B 16 TG-RO M25	25			5

U.I. Lapp GmbH	PRODUCT INFORMATION	 LAPP GROUP
	EPIC® H-B 16 TG-RO	05.11.2015

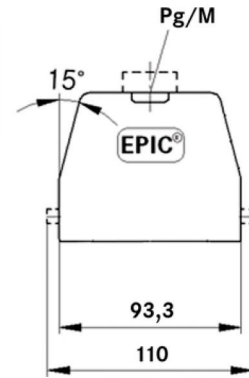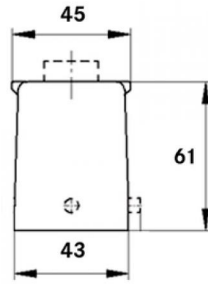

Product Management	Document: LAPP_PRO410EN.pdf	3 / 3
--------------------	-----------------------------	-------