

UL 2464 18AWG/10C PVC/PVC Cable



PRODUCT DATA SHEET

Internal wiring or external interconnection of electric equipment.


Design Number 10669
Part Number 32171104
Customer Number N/A

CONSTRUCTION

Conductor: Stranded tinned copper
Conductor Size: 18AWG(16/30)
Insulation: Polyvinyl Chloride
Insulation Thickness: 0.016"(Nom.)
Insulation Diameter: 0.080"(Nom.)
Jacket Material: Polyvinyl Chloride
Jacket Avg. Thickness: 0.030"(Nom.)
Overall Diameter: 0.380"(Nom.)
Jacket Color: Gray

Print Legend:

ASCENT E477982 ** AWM 2464 80°C 300V VW-1 c AWM I/II A/B
80°C 300V FT1 UV Resistant 10CX18AWG MANUFACTURED FOR ELECTRICAL
ACCESSORIES RoHS Length Marking
"***" = Factory ID

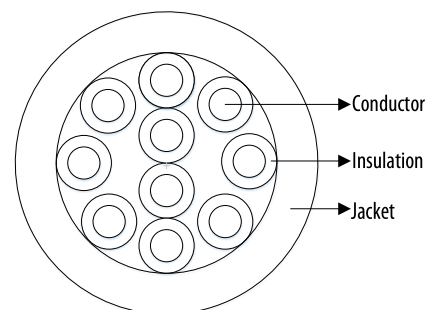

Color Code: Black, Red, White, Green, Orange
Blue, Brown, Yellow, Violet, Gray

PHYSICAL CHARACTERISTICS

Operating Temperature (°C): -35°C to +80°C
Flame Test: UL VW-1
UV Resistant

SAFETY CHARACTERISTICS

Approvals: UL AWM Style 2464 per UL standard 758
RoHS Compliant

Application: Internal wiring or external interconnection of electric equipment.

All trademarks are property of their respective owners. All specifications are subject to change.

Revision History	
00	2022/10/10 Initial release
01	2022/10/28 Update Part Number to 32171104
02	2023/03/20 The print legend is updated according to customer's request
Created L. Jian	Approved A. Huang

Milwaukee | 5001 South Towne Dr. New Berlin, WI 53151, USA
Frankfurt | Rudolf-Braas-Strasse 2, D-61381 Friedrichsdorf, Germany
Luton | Unit 11, Humphrys Road, Woodside Industrial Estate, Dunstable, LU5 4TP, UK
Suzhou | B2-2 Weiting Industrial - Workshop A, No. 9 Weixin Road, Suzhou Industrial Park, China

