

14/4 Type SJTOW Black



PRODUCT DATA SHEET

SJTOW cable, rated at 300 volts, has excellent oil resistant and weather resistant characteristics. Generally used in flexible power cords, it is designed for equipment used where industrial and wet environments are present.


Design Number 10807
Part Number 32180334
Customer Number N/A

CONSTRUCTION

Conductor: Stranded bare copper
Conductor Size: 14AWG(41/30)
Insulation: Polyvinyl chloride (PVC)
Insulation Avg. Thickness: 0.030"(Nom.)
Insulation Diameter: 0.138"(Nom.)
Jacket Material: Polyvinyl chloride (PVC)
Jacket Avg. Thickness: 0.030"(Nom.)
Overall Diameter: 0.402"(Nom.)
Jacket Color: Black

Print Legend:

ASCENT E486041 IH (UL) SJTOW VW-1 105°C 300V 4/C 2.08 mm² (AWG 14) OIL RESISTANT c(UL) SJTOW FT2 105°C 300V 4/C 14 AWG (2.08 mm²)

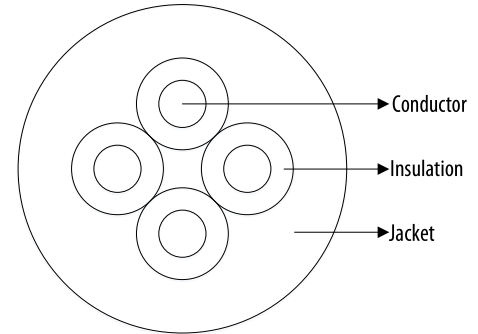

Color Code: Black, Red, White, Green/yellow

ELECTRICAL CHARACTERISTICS

Operating Temperature (°C): 105°C
Operating Voltage: 300V
Conductor Resistance @ 25°C: 9.06 Ω/km Max
Flame Test : UL VW-1 and CSA FT2

SAFETY CHARACTERISTICS

Approvals: UL, the basic standard is UL 62 "Flexible Cords and Cables"
c(UL) approved to meet CSA standard C22.2, flexible cords
RoHS Compliant

Application: Portable power tools, light duty motors, lighting, and temporary electric power

All trademarks are property of their respective owners. All specifications are subject to change.

Revision History		
00	2023/06/14	Initial release
Created L. Jian		Approved A. Huang

Milwaukee | 5001 South Towne Dr. New Berlin, WI 53151, USA
Frankfurt | Rudolf-Braas-Strasse 2, D-61381 Friedrichsdorf, Germany
Luton | Unit 11, Humphrys Road, Woodside Industrial Estate, Dunstable, LU5 4TP, UK
Suzhou | B2-2 Weiting Industrial - Workshop A, No. 9 Weixin Road, Suzhou Industrial Park, China

