

2x2x22AWG Industrial Ethernet Cable Profinet

Profinet Type B, For Flexible Application

Stranded Tinned Copper Wires



PRODUCT DATA SHEET

Profinet Type B Category 5e Stranded Conductor SF/UTP Copper Cable provides reliability and high performance as an integral component of the end to end solution for industrial PROFINET based communications networks.

Category 5e rated cable is suitable for transmission of high performance 10BASE-T, 100BASE-T and 1000BASE-T uplinks featuring up to gigabit data transmission from the control panel to the consolidation point.

CONSTRUCTION

Conductor	Stranded tinned copper
Conductor Size	22AWG(7/30)
Insulation Material	High Density Polyethylene
Core Diameter	Nom.1.5mm
Filler in the center (optional)	Solid PE bar (optional)
Stranding	4 cores twisted in star quad construction
Wrapping	Plastic tape (overlapping)
Inner Sheath Material (optional)	Polyethylene, natural
Inner Diameter	Nom. 4.0mm
Screen	Aluminum foil (overlapping)
Braid	Tinned copper wire, coverage min 80%
Outer Sheath Material	Polyurethane
Outer Diameter	6.5±0.3mm
Outer Sheath Color	Matt Green (Similar RAL 6018)

Print Legend

ASCENT E477982 ** AWM 20549 80°C INDUSTRIAL ETHERNET CABLE
PROFINET TYPE B PUR CAT5E 2x2x22AWG 80°C CE XXXXXM

Note: "***" is factory code

MECHANICAL & PHYSICAL PROPERTIES

Operating Temperature (°C) -40°C to +80°C (Fixed installation)
-20°C to +75°C (Flexing)

Flame Retardant IEC 60332-1-2


Min. Bending Radius Fixed 5 x OD
Flexing 10 x OD

Certification UL File E477982, AWM 20549

Reference Standard TIA-568.2-D, ISO/IEC 11801

RoHS Compliant

CE Compliant

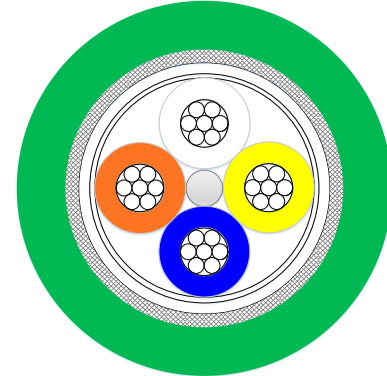

COLOR CODE

Pair 1: White, Blue

Pair 2: Yellow, Orange

ELECTRICAL PROPERTIES

Peak Operating Voltage	300V (not for power purposes)
Dielectric Strength	Cond. to Cond. 2000V Cond. to Screen 2000V
Conductor Resistance@20°C	60 Ω/km Max.
Insulation Resistance@20°C	5000 MΩ.km Min.
Characteristic Impedance	100±15 Ω (1~100MHz)
Propagation Delay	555 ns/100m Max.
Delay Skew	20 ns/100m Max.
Velocity of Propagation	67%

TRANSMISSION PERFORMANCE

FLUKE PROFINET CHANNEL CAT5E 100M TEST

Freq.	ATT	RL	NEXT	PSNEXT	ELFEXT	PSELFEXT
MHz	Max.	Min.	Min.	Min.	Min.	Min.
	dB	dB	dB	dB	dB	dB
4	4.5	17.0	53.5	50.5	45.4	42.4
8	6.3	17.0	48.6	45.6	39.3	36.3
10	7.1	17.0	47.0	44.0	37.4	34.4
16	9.1	17.0	43.6	40.6	33.3	30.3
20	10.2	17.0	42.0	39.0	31.4	28.4
25	11.4	16.0	40.3	37.3	29.4	26.4
31.25	12.9	15.1	38.7	35.7	27.5	24.5
62.5	18.6	12.1	33.6	30.6	21.5	18.5
100	24.0	10.0	30.1	27.1	17.4	14.4

Design Number	10815
Part Number	32181093
Revision History	
00	2023/07/07 Initial Release
Created L. Jian	Approved A. Huang

All trademarks are property of their respective owners. All specifications are subject to change.

Milwaukee | 5001 South Towne Dr. New Berlin, WI 53151, USA
Frankfurt | Rudolf-Braas-Strasse 2, D-61381 Friedrichsdorf, Germany
Luton | Unit 11, Humphrys Road, Woodside Industrial Estate, Dunstable, LU5 4TP, UK
Suzhou | B2-2 Weiting Industrial - Workshop A, No. 9 Weixin Road, Suzhou Industrial Park, China

