

Description: SPT-1 18/3C,
PVC Insulation,
105C, 300V

Create Date: 08/15/2023

Design No.: 10844

IEWC P/N: 32182983

Components Ground Wire 18AWG

Nom OD

Conductor: 18AWG, 41/34 strand bare copper
Insulation: 0.38mm nom. thickness, PVC, Green

2.05mm

Overall Cable Construction

Conductor: 18AWG, 41/34 strand bare copper
Jacket: 0.76mm min avg. thickness, PVC, Black

2.8x8.0mm

Print

ASCENT E486041 ** (UL) SPT-1 3x18AWG (0.824mm²) VW-1 105°C 300V GREEN CONDUCTOR
FOR GROUNDING ONLY C(UL) SPT-1 3x0.824mm² (18AWG) 105°C 300V FT2


Note: "***" = Factory Code

Requirements

Operating Temperature: 105°C
Operating Voltage: 300V
Flame Test: UL VW-1, CSA FT2

Approvals

UL 62 SPT-1
RoHS Compliant

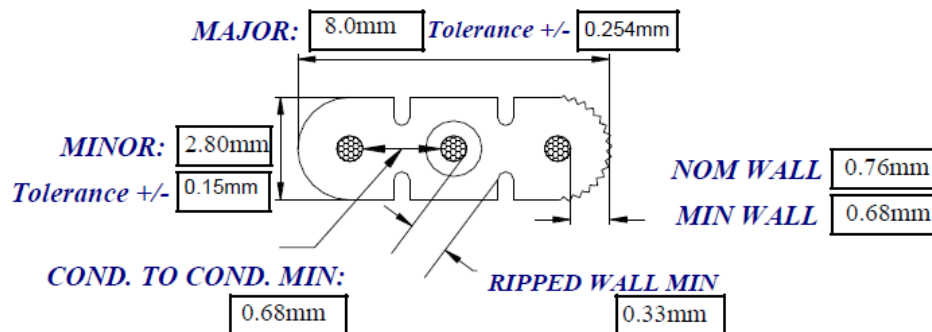

Created: Lizzy Jian