

Description: FEP/TPC 22AWG/2C,

Overall Braid

PFA Jacket

Create Date: 03/19/2024**Design No.:** 10934**IEWC P/N:** 32189610**Components** Two 22AWG FEP Insulated conductors**Nom OD**

Conductor: 22AWG, 19/34 stranded tinned copper

0.80mm

Insulation: 0.25mm nom thickness, FEP (color code)

1.30mm

Overall Cable Construction

Cabling: Two cores twisted together

Tape: Polyester tape

Braid: Tinned copper, coverage min 85%

Jacket: 0.25mm nom. thickness, PFA, White

3.6mm

Print

No

Color Code

1.Red 2.White

Requirements

Operating Temperature: -65°C to +200°C


Operating Voltage: 600V

Cond DC Resistance: Max 59.4Ω/km @20°C

Dielectric Test: AC 2.0 kV/min

RoHS Compliant

REACH Compliant

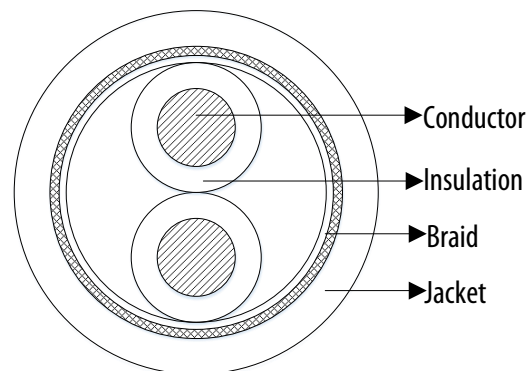

Created: Lizzy Jian