

**Description:** 26/2C Instrumentation Cable  
Overall braid, PVC Jacket  
300V, 90°C

**Create Date:** 05/22/2024

**Design No.:** 10963

**IEWC P/N:** 32191652

---

<b>Components</b>	<b>Nom OD</b>
Two PVC Insulated Conductors	
Conductor: 26AWG, 65/0.05mm stranded tinned copper	
Insulation: 0.008" nom thickness, PVC (color code)	0.033"

---

### **Overall Cable Construction**

Cabling Assembly: Two wires twisted with fillers  
Filler: for a circular cross-section  
Braid: Tinned copper, coverage nom. 80%  
Jacket: 0.012" nom thickness, PVC, White 0.103"

---

### **Print**

No

---


### **Color Code**

1. White 2. Black

---

### **Requirements**

Operating Temperature: -40°C to +90°C  
Operating Voltage: 300V  
Cond DC Resistance: Max 150Ω/km @20°C  
Dielectric Test: 2.0 kV/min  
RoHS Compliant

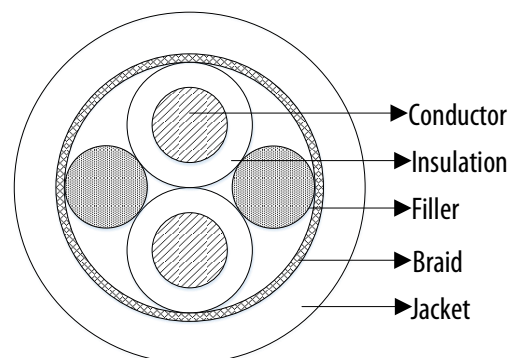

Created: Lizzy Jian