

UL CMR/2464 22AWG/3C, Red



PRODUCT DATA SHEET

Cable is suitable for installation under NEC (NFPA 70) article 800 guidelines.
Cable is suitable for installation in Canada under Section 60 of CEC, Part I.
Internal wiring or external interconnection of electronic equipment.


Design Number 10972
Part Number 6000001121
Customer Number N/A

CONSTRUCTION

Conductor: Stranded tinned copper
Conductor Size: 22AWG(7/30)
Insulation: Polyvinyl Chloride
Insulation Thickness: 0.016"(Nom.)
Insulation Diameter: 0.062"(Nom.)
Cable Lay Length: 2.25"(Nom.)
Jacket Material: Polyvinyl Chloride
Jacket Thickness: 0.032"(Nom.)
Overall Diameter: 0.197"(Nom.)
Jacket Color: Red

Print Legend (Footage Markers):

ASCENT E478021 22AWG 3C 75C C(UL)US TYPE CMR SUN RES OR AWM
2464 300V 80C OR AWM 2576 150V 80C OR CSA LL604274 AWM I/II A/B
90C 300V FT1 FT2 FT4 -40C "ROHS COMPLIANT" MADE IN USA

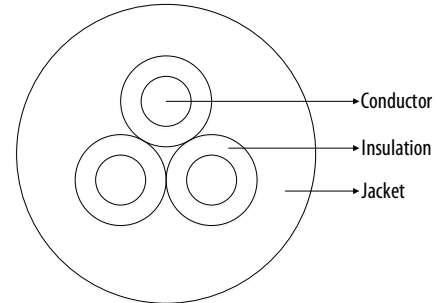

Color Code: Black, White, Red

ELECTRICAL CHARACTERISTICS

Operating Temperature (°C): 80°C
Operating Voltage: 300V
Weight: 21 Lbs/Mft

SAFETY CHARACTERISTICS

C(UL)US listed as CMR per UL standard 444 and per CSA C22.2 No. 214-17
UL recognized component as AWM 2464, 80°C, 300V per UL standard 758
Cable meets RoHS 2002/95/EC Directive, RoHS 2 2011/65/EU Directive,
RoHS 3 2015/863/EU Directive
Cable is REACH compliant per Regulation (EC) No 1907/2006 (240)
Updated January 23, 2024

Application: Internal wiring or external interconnection of electronic equipment

All trademarks are property of their respective owners. All specifications are subject to change.

Revision History	
00	2024/05/31 Initial Release
Created L. Jian	Approved A. Huang

Milwaukee | 5001 South Towne Dr. New Berlin, WI 53151, USA
Frankfurt | Rudolf-Braas-Strasse 2, D-61381 Friedrichsdorf, Germany
Luton | Unit 11, Humphrys Road, Woodside Industrial Estate, Dunstable, LU5 4TP, UK
Suzhou | B2-2 Weiting Industrial - Workshop A, No. 9 Weixin Road, Suzhou Industrial Park, China

