


GeneralCable
2/C #2/OAWG + 2/C 4AWG
125°C 600V COMPOSITE CABLE

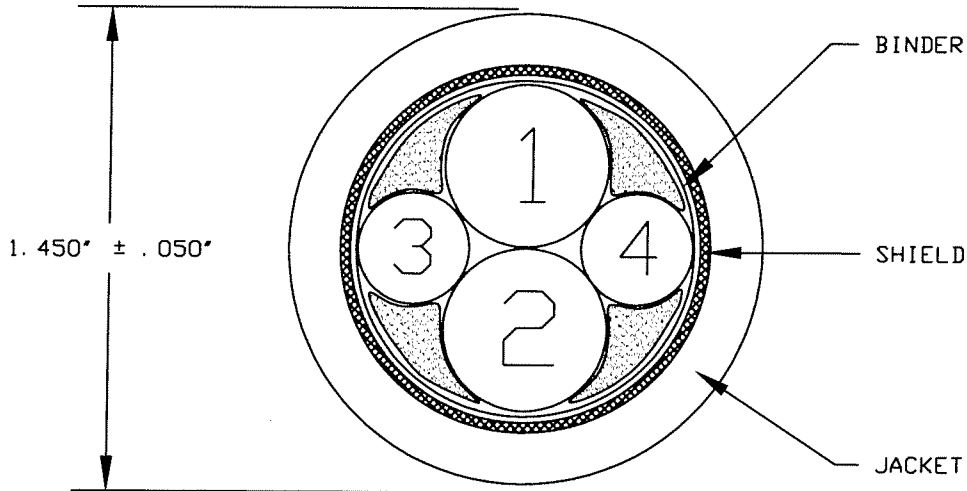

COMPONENT I - SINGLE CONDUCTOR #2/OAWG (SC #2/O)
(ITEMS 1-2) CONDUCTOR: #2/OAWG 1330/30 ROPE (19x70/30) TINNED COPPER
INSULATION: PVC -.082" NOMINAL WALL
DIAMETER: .614" NOMINAL
UL: STYLE 1284 105°C 600V

COMPONENT II- SINGLE CONDUCTOR #4AWG (SC #4)
(ITEMS 3-4) CONDUCTOR: #4AWG 133/25 ROPE (19x7/25) TINNED COPPER
INSULATION: PVC -.062" NOMINAL WALL
DIAMETER: .384" NOMINAL
UL: STYLE 1283 105°C 600V

FILLERS AS REQUIRED TO MAINTAIN A CIRCULAR CABLE CROSS SECTION

CABLE CORE: TWO (2) SC #2/O (ITEMS 1-2) + TWO (2) SC #4 (ITEMS 3-4)
CABLED TOGETHER WITH A LEFT HAND LAY
BINDER: .002" MYLAR TAPE-25% OVERLAP
SHIELD: #30AWG TINNED COPPER BRAID-85% MINIMUM COVERAGE
JACKET: XLPE (BLACK) 125°C -.085" NOMINAL WALL
DIAMETER: 1.450" ± .050"
JACKET PRINT: "GENERAL CABLE BRAND REX BRAND (WC) 2/C
2/OAWG + 2/C 4AWG 125C 600V ROHS COMPLIANT"

COLOR CODE	ITEM NUMBER	COLOR
	1	BLACK
	2	RED
	3	GREEN/YELLOW*
	4	GREEN/YELLOW*

*NOTE: 30% - 40% LONGITUDINAL STRIPE

REVISIONS	0	03/06/08	FIRST ISSUE	<p>GeneralCable 1600 West Main Street, Willimantic, CT 06226-1128 <u>The Power of One</u></p>	
	A	03/10/08	CONSTRUCTION		
	B	05/14/08	ADD PART NUMBER		
				DRAWING NO: 12-1767	
REFERENCES	IEWC/ACTRONIX			DRAWN BY: CAD	APPROVED BY: M. LAJEUNESSE
	GeneralCable P/N 388270			<p>THIS DRAWING IS THE PROPERTY OF GeneralCable AND SHALL NOT BE REPRODUCED, COPIED, OR USED AS BASIS FOR THE MANUFACTURE OR SALE OF THIS DESIGN WITHOUT THE PERMISSION OF GeneralCable</p>	