

P/N: 128502

NUMBER OF 10 AWG PRIMARIES: 4  
CONDUCTOR: 10 AWG (105/30) TINNED PLATED COPPER  
PRIMARY INSULATION: .015" MIN. AVG. WALL ETFE  
PRIMARY O.D.: .142" ( + / - .003")  
COLOR CODE: BLACK, BLACK, BLACK, GREEN/YELLOW

NUMBER OF 18 AWG PRIMARIES: 2  
CONDUCTOR: 18 AWG (19/30) TINNED PLATED COPPER  
PRIMARY INSULATION: .010" MIN. AVG. WALL ETFE  
PRIMARY O.D.: .067" NOM.  
COLOR CODE: BLUE, BLUE


FILLERS: FOAMED POLYPROPYLENE - NON WICKING  
AS REQUIRED FOR ROUNDNESS

SEPARATOR: NON-WOVEN POLYESTER TAPE

JACKET: .065" NOM. WALL POLYURETHANE  
JACKET COLOR: BLACK  
FINISHED DIAMETER: .525" ( + / - .015")  
CABLE RATINGS: 600V, 105°C (UL), 105°C (CSA)  
APPROVALS PER UL STYLE 20952 & CSA

CABLE WEIGHT: 225 LBS./MFT. NOMINAL

PROPRIETARY

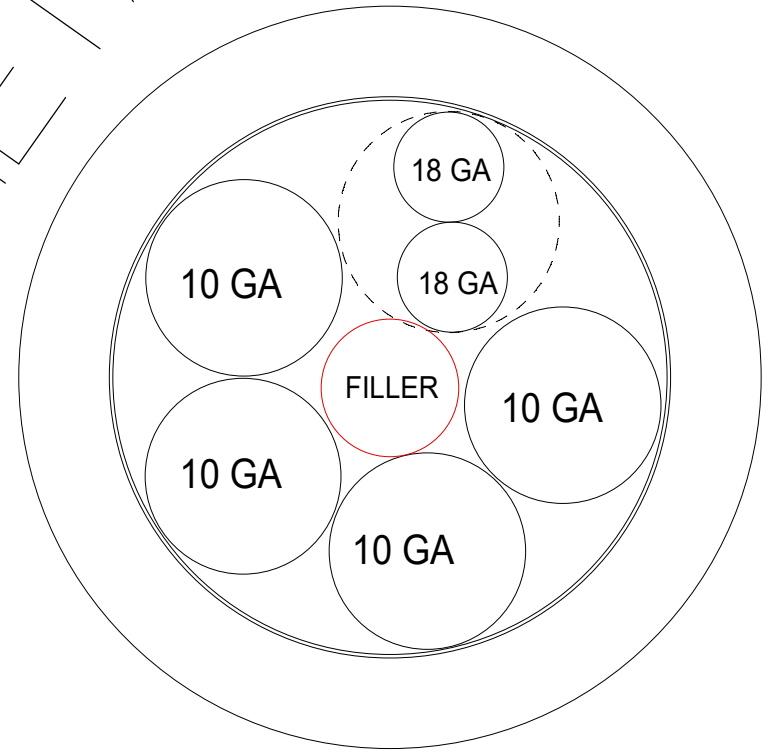

REVISIONS:	DATE:
ADDED CABLE WEIGHT	5/8/06

P/N: 0006CB-0QSE6 (128502)

DATE: 9/23/04

DRAWN: RD

**OMERIN USA**  
**QS TECHNOLOGIES DIV**  
 95 RESEARCH PARKWAY  
 MERIDEN, CT 06450  
 PH: 203-237-2287 FAX: 203-634-8756