

MOTOMAN P/N: 146258-1

NUMBER OF CONDUCTORS: 12

COMPONENT A: 1 TWISTED PR. 20 AWG SHIELDED

AWG/STRAND: 20 AWG (105/40) TINNED COPPER
PRIMARY INSULATION: .007" NOM. WALL TEFZEL
PRIMARY O.D.: .055" (+/- .002")
COLOR CODE: RED & BLACK
DRAIN WIRE: 22 AWG (19/34) TINNED COPPER
FOIL SHIELD: ALUMINUM MYLAR - 25% MIN. LAP
FOIL SIDE FACING IN OR DOWN.

COMPONENT B: 3 X 16 AWG PRIMARIES


AWG/STRAND: 16 AWG (105/36) TINNED COPPER
PRIMARY INSULATION: .008" NOM. WALL TEFZEL
PRIMARY O.D.: .083" (+/- .002")
COLOR CODE: BLUE, BLACK & GREEN

COMPONENT C: 7 X 20 AWG PRIMARIES

AWG/STRAND: 20 AWG (105/40) TINNED COPPER
PRIMARY INSULATION: .007" NOM. WALL TEFZEL
PRIMARY O.D.: .055" (+/- .002")
COLOR CODE: BLK, WHT, RED, GRN, BRN, BLU & ORG

FILLER: FOAMED POLYPROPYLENE - NON WICKING

CABLE: ABOVE COMPONENTS AROUND FILLER IN CENTER
SEPARATOR: .001" CLEAR POLYESTER
JACKET: .055" NOMINAL WALL POLYURETHANE
JACKET COLOR: BLACK
FINISHED O.D.: .420" NOMINAL
RATING: 300 VOLTS - 80°C
APPROVALS PER UL STYLE 20233 & CSA

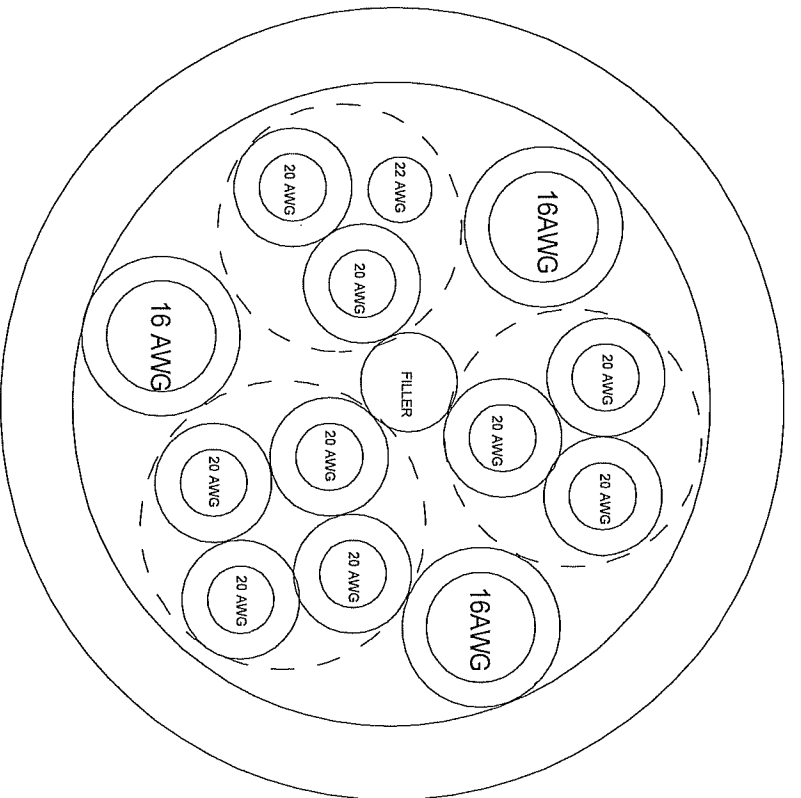

REVISIONS: DATE:

REVISIONS:	DATE:

P/N: 0012CB-00SA (108470)

DATE: 8/2/04

DRAWN: RD

INDUSTRIAL ELECTRIC
WIRE & CABLE, INC.
31390 VIKING PARKWAY
WEST LAKE, OHIO 44145-0282
PH: 440-835-5601 FAX: 440-835-5971