


CUSTOMER: P/N: **0287.180** REV. . APPROVED BY:


REVISIONS		
REV.	DESCRIPTION	DATE
△	The plug insert changed to the exposed type Change the cable specification and note 1.4	2024/11/05

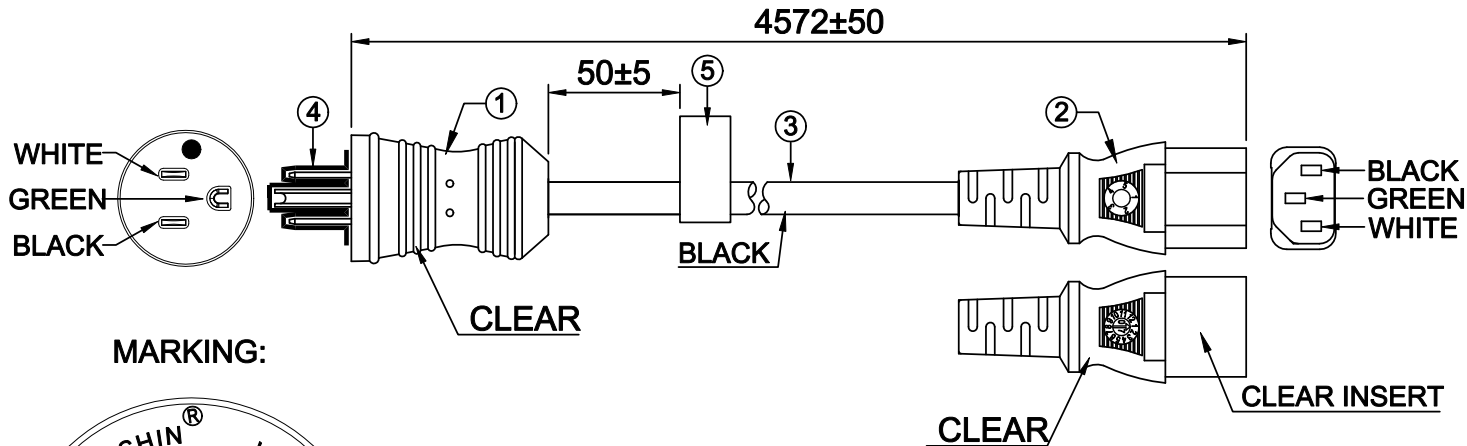



NOTES:

- △ 1. ZH(Zhang Hwa) factory begin from revision C.
- 2. RoHS shown on the carton
- 3. WS-002 Use a Clear Insert
- △ 4. The shield must be connected ONLY to the green cable(earth) on both plug/connector


MARKING:

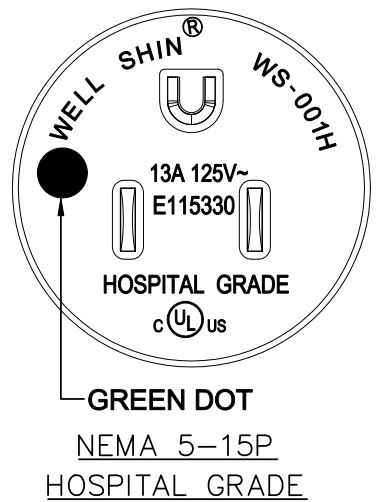

MARKING:

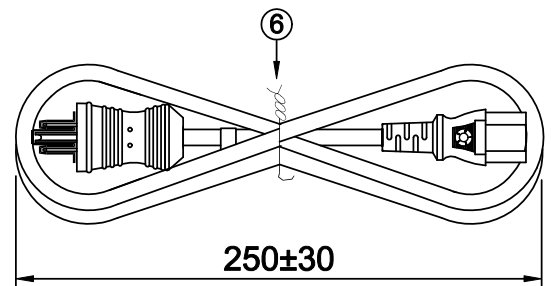

⑤ Hosp. Grade label(English/French version)

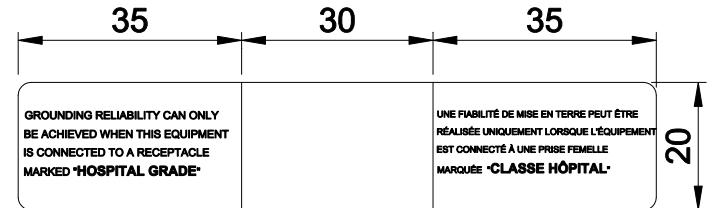

(English)

(French)

ITEM	DESCRIPTION	COLOR	QTY
⑥	Cable tie	BLACK	1
⑤	Hosp. Grade label(English/French version)	---	1
④	PLASTIC CAP	WHITE	1
③	SJTW 16AWG 3C 105°C SHIELDED	BLACK	1
②	WS-002 13(A) 125(V)	CLEAR	1
①	WS-001H 13(A) 125(V)	CLEAR	1

ENGINEER BY:	SIGNATURE
MANAGER BY:	
CHECKED BY:	
DRAWN BY:	

QUAIL ELECTRONICS, INC.®
http://www.quail.com

PRODUCT NO.: DATE: **2024/11/05**

UNIT: mm SHEET: 1 OF 1 REV. **J**

DWG NO: 0096-2058