






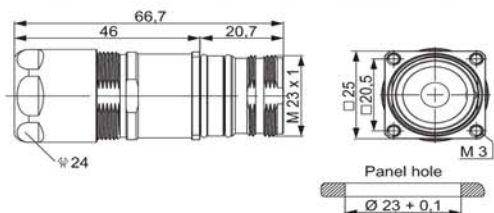



Signal Connectors M 23 / Housing

Straight Connector, Female Thread		Cable-Ø	Part Number
		3 – 7 mm (.12 – .28").....7.106.400.000	
		7 – 12 mm (.28 – .47").....7.106.500.000	
		11 – 17 mm (.44 – .67").....7.106.600.000	
		Contacts and inserts page 74 • Assembly instructions page 88	

Straight Connector, Female Thread TWILOCK / TWILOCK-S*		Cable-Ø	Part Number
		3 – 7 mm (.12 – .28").....7.166.400.000	
		7 – 12 mm (.24 – .47").....7.166.500.000	
		11 – 17 mm (.43 – .67").....7.166.600.000	
		* Compatible to Speedtec 3 – 7 mm (.12 – .28").....7.166.400.00S 7 – 12 mm (.24 – .47").....7.166.500.00S 11 – 17 mm (.43 – .67").....7.166.600.00S	
		Contacts and inserts page 74 • Assembly instructions page 88	

Straight Connector, Male Thread		Cable-Ø	Part Number
		3 – 7 mm (.12 – .28").....7.206.400.000	
		7 – 12 mm (.28 – .47").....7.206.500.000	
		11 – 17 mm (.44 – .67").....7.206.600.000	
		Contacts and inserts page 74 • Assembly instructions page 88	

Panel Connector, Male Thread, with Strain Relief		Cable-Ø	Part Number
		4 threads M3, rear mounting	
		3 – 7 mm (.12 – .28").....7.476.400.000	
		7 – 12 mm (.28 – .47").....7.476.500.000	
		11 – 17 mm (.44 – .67").....7.476.600.000	
		Optional: Flat gasket 	
		Contacts and inserts page 74 • Assembly instructions page 88	