


«« PROPRIETARY INFORMATION OF OPTICAL CABLE CORPORATION »»
 DETAIL DRAWING
 2-CHANNEL
 HIGH STRENGTH FIBER OPTIC BREAKOUT CABLE TYPE OFNR
 OPTICAL CABLE CORPORATION P/N:
OC-0004669

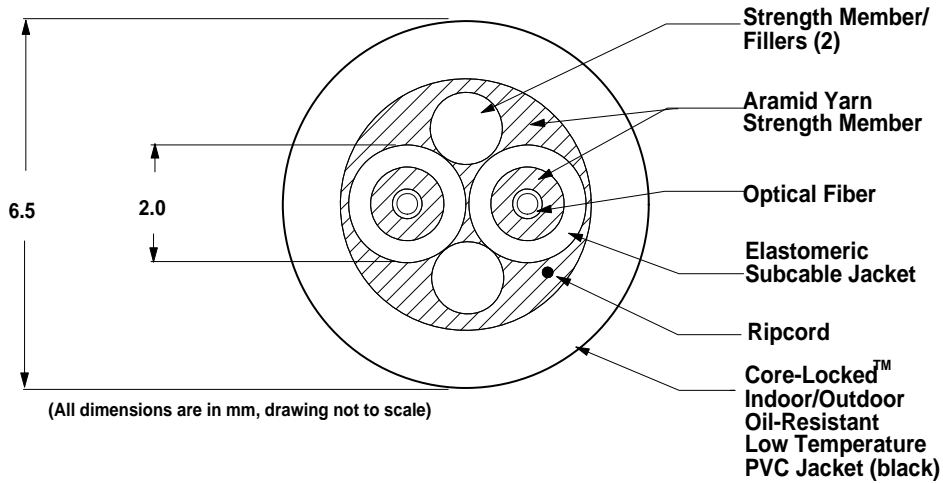

Fiber Type	Multimode
Core Diameter	200 μ m
Cladding Diameter	230 μ m
Buffer Diameter	500 μ m
Numerical Aperture	0.37
Proof Test Level	100 kpsi

<u>Wavelength:</u>	<u>850 nm</u>
Maximum Attenuation	8.0 dB/km

Cable Weight	33 kg/km (22 lbs/1000')
Cable Diameter	6.5 mm (0.26 in)

INSTALLATION:

MAX. TENSILE LOAD	2200 N (500 lbs)
MIN. BEND RADIUS	9.75 cm (3.8 in)

OPERATING:

MAX. TENSILE LOAD	550 N (120 lbs)
MIN. BEND RADIUS	6.5 cm (2.6 in)

OPERATING TEMPERATURE	\leq 10dB/km @ -20°C
INSTALLATION TEMPERATURE	-10°C to +60°C (actual temperature of cable)
FLAME RETARDANCY	UL Listed Type OFNR (1666)

Print: (every meter)	PCF BUS INDOOR/OUTDOOR 2K200/230 LAPP SYSTEMS GMBH ART NR.: LS112322 – OFNR UL 1666 / C(UL)US E92319 FT-4 <I> <D ww/yy >
----------------------	--

CUSTOMER NAME/TITLE: _____ DATE: _____