

CAT. No.

74630-BLK

CHINA PLUG, ANGLE TYPE CORD GRIP, 16A-250V (CH2-16P), 2 POLE-3 WIRE GROUNDING, BLACK.
 CCCs APPROVAL. GB2099.1, GB1002


APPROVALS

CCCs

STANDARDS

GB2099.1 GB1002

ALL DIMENSIONS ARE IN MILLIMETERS

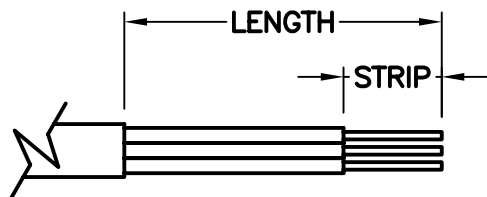

CORDAGE PREPARATION

MAXIMUM JACKET O.D. ACCEPTED BY EXTERNAL STRAIN RELIEF = 10 DIA (0.394")
 MAXIMUM JACKET O.D. ACCEPTED BY INTERNAL STRAIN RELIEF = 9 DIA (0.354")
 MAXIMUM CONDUCTOR SIZE ACCEPTED BY TERMINALS = 4.0 (12 AWG)

CORDAGE PREPARATION

CONDUCTOR INSULATION COLOR	CONDUCTOR COLOR CODE	"LENGTH"	"STRIP"
GREEN/YELLOW	GROUND	30	6
BLUE	NEUTRAL	12	6
BROWN	LINE	12	6

